

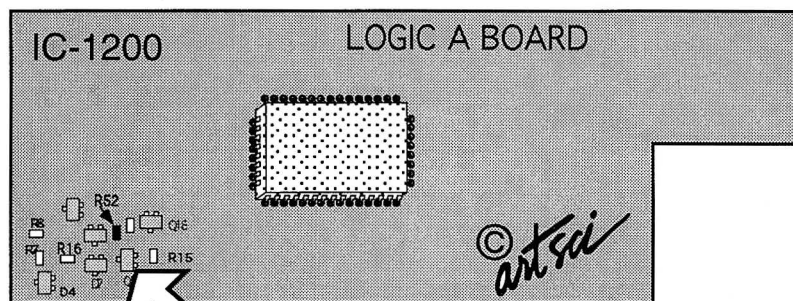
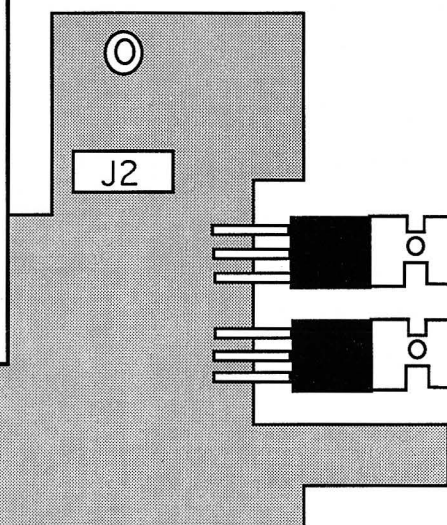


Expansion Range  
870 MHz - 960 MHz

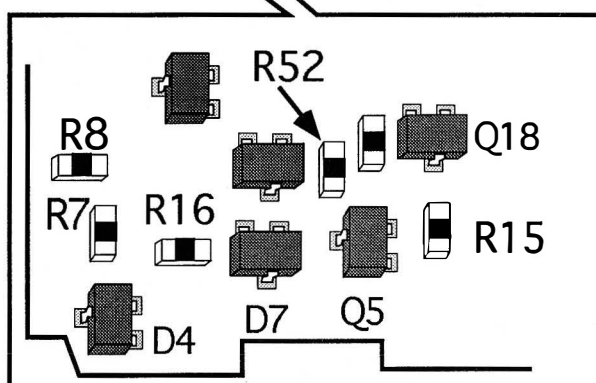

R8 - Low TX Pwr  
Hi TX Pwr



### Expanded RF Modification

1. Remove Power and Antenna.
2. Remove screws open case.
3. Locate and **cut Resistor R52** on Logic A unit.
4. **Install a new antenna connector** to position J2 on RF board.  
Note: a different antenna is required for the 870-960 bands
5. Reassemble the radio.
6. **Reset the microprocessor.**  
(Hold down the tuning control and turn the power on)  
or  
(Insert a toothpick in hole in the corner of the bottom cover.)

### Radio/Tech Modifications Volume B

Photocopies are a violation of copyright law. © artsci inc. all rights reserved.

Have the original book with you when you call with a question. **Use at your own Risk!**

The Author and all other parties take no responsibility for any damages or violations caused by these modifications. Some modifications may violate FCC rules.

(818) 843-4080 12-4 PST • www.artscipub.com • artsci@artscipub.com