

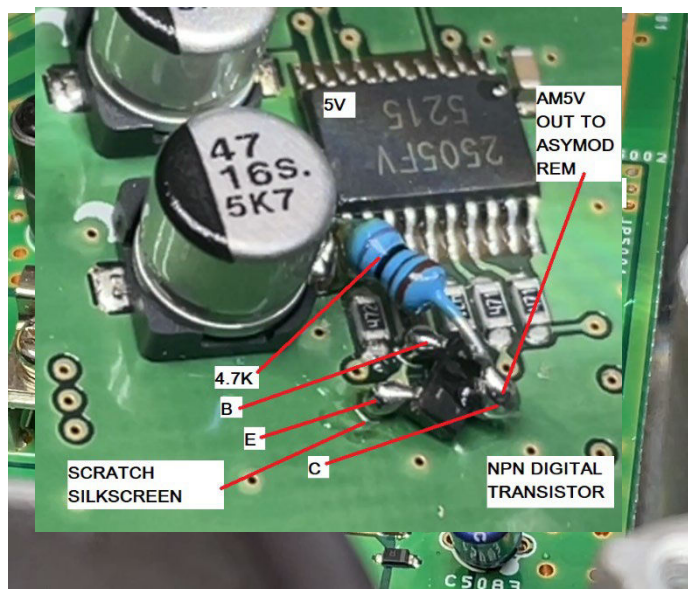
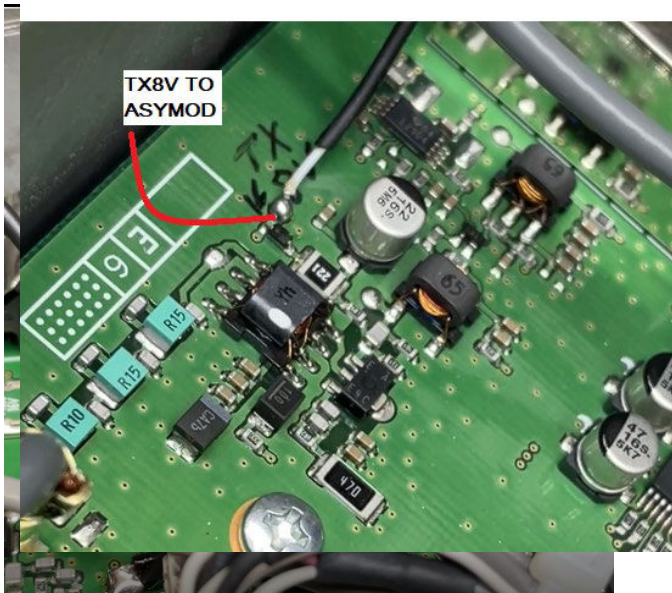
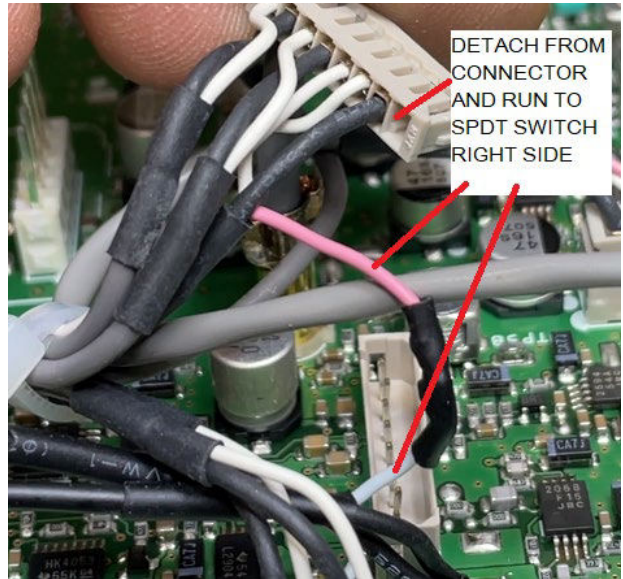
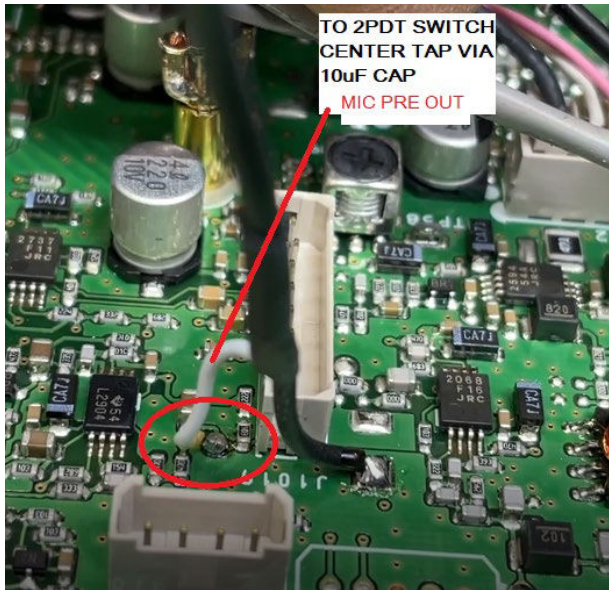





Yaesu FTDX 1200 **A**symod 7





StandAlone


Installation Instructions

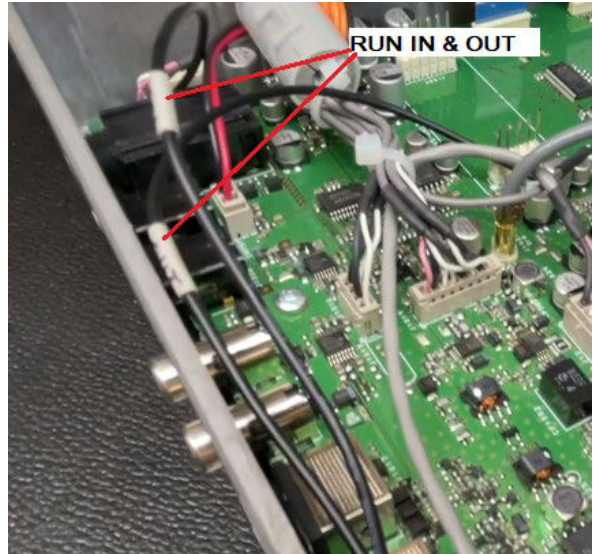

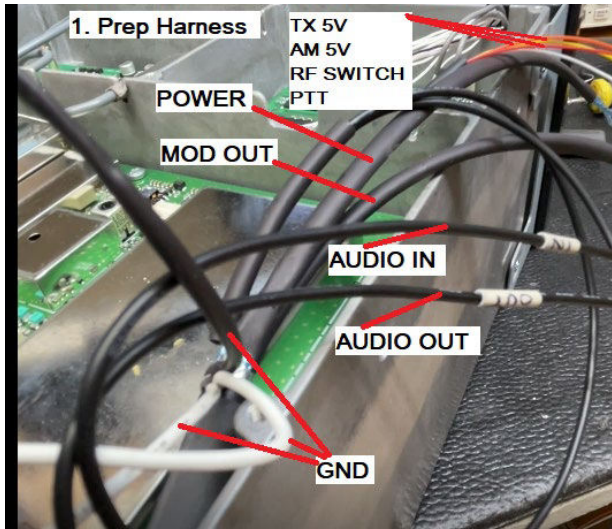

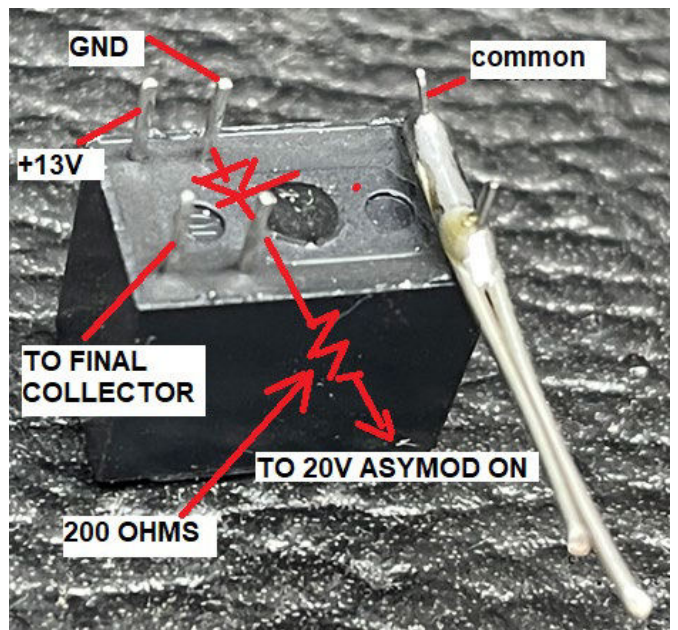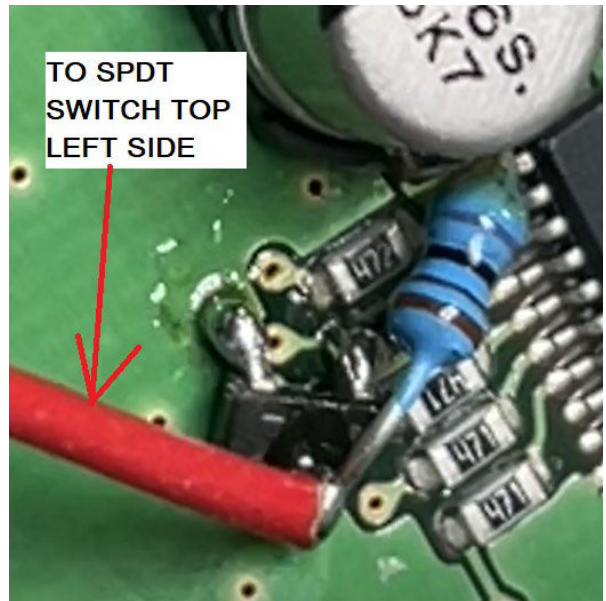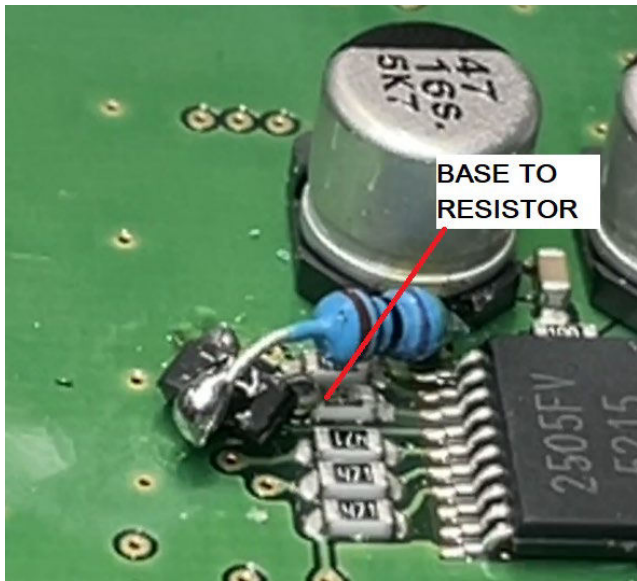

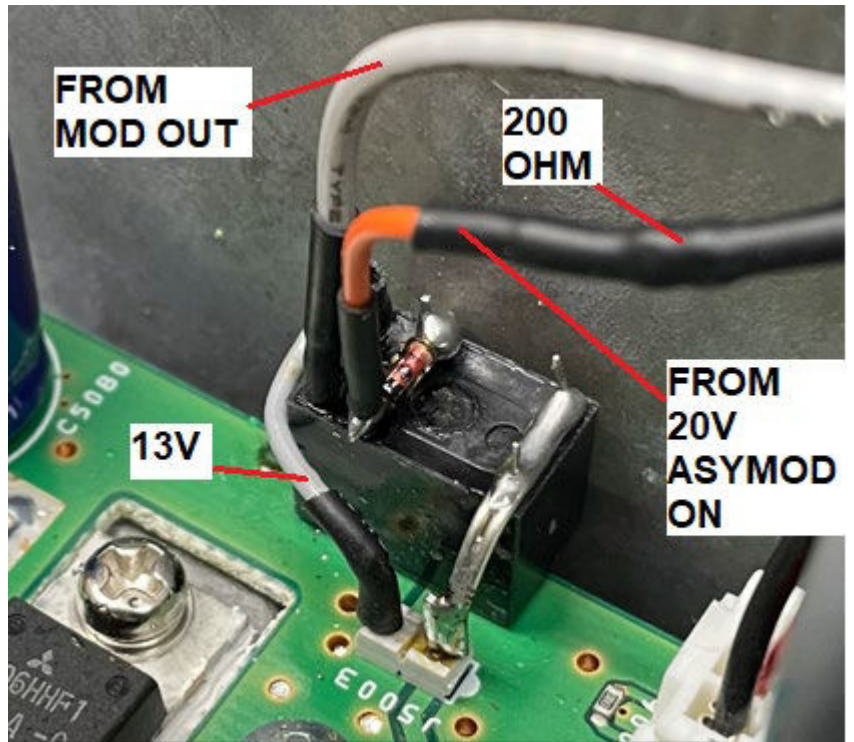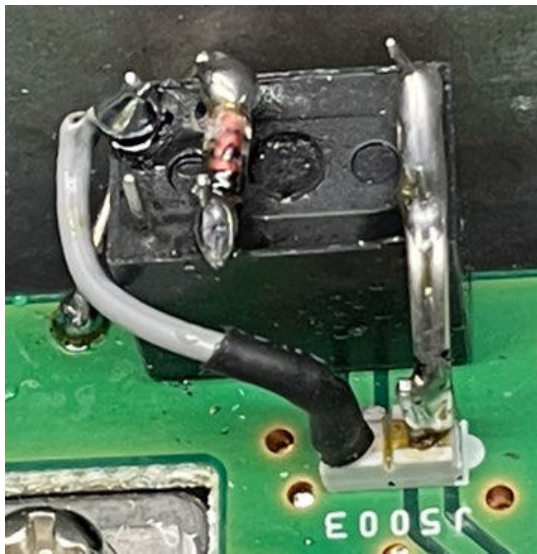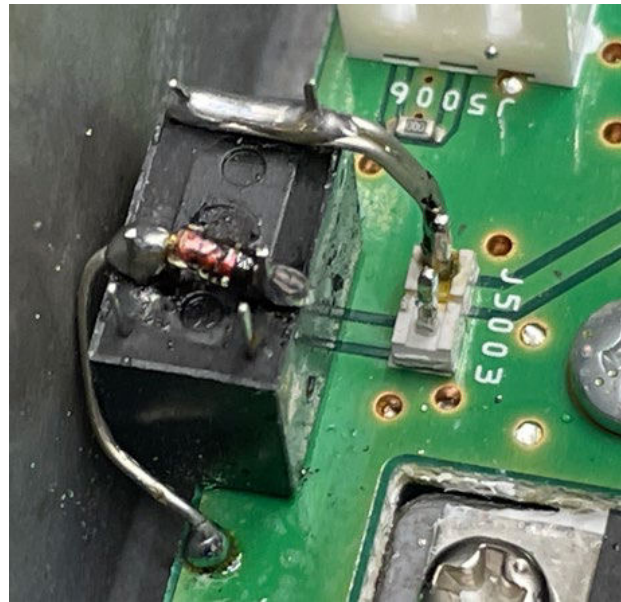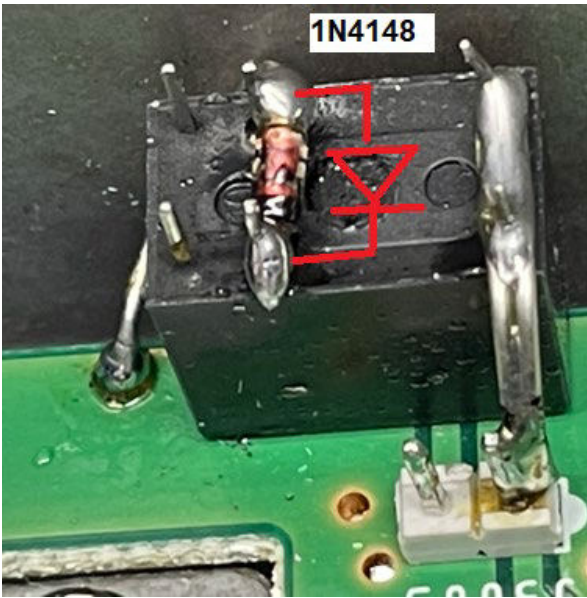


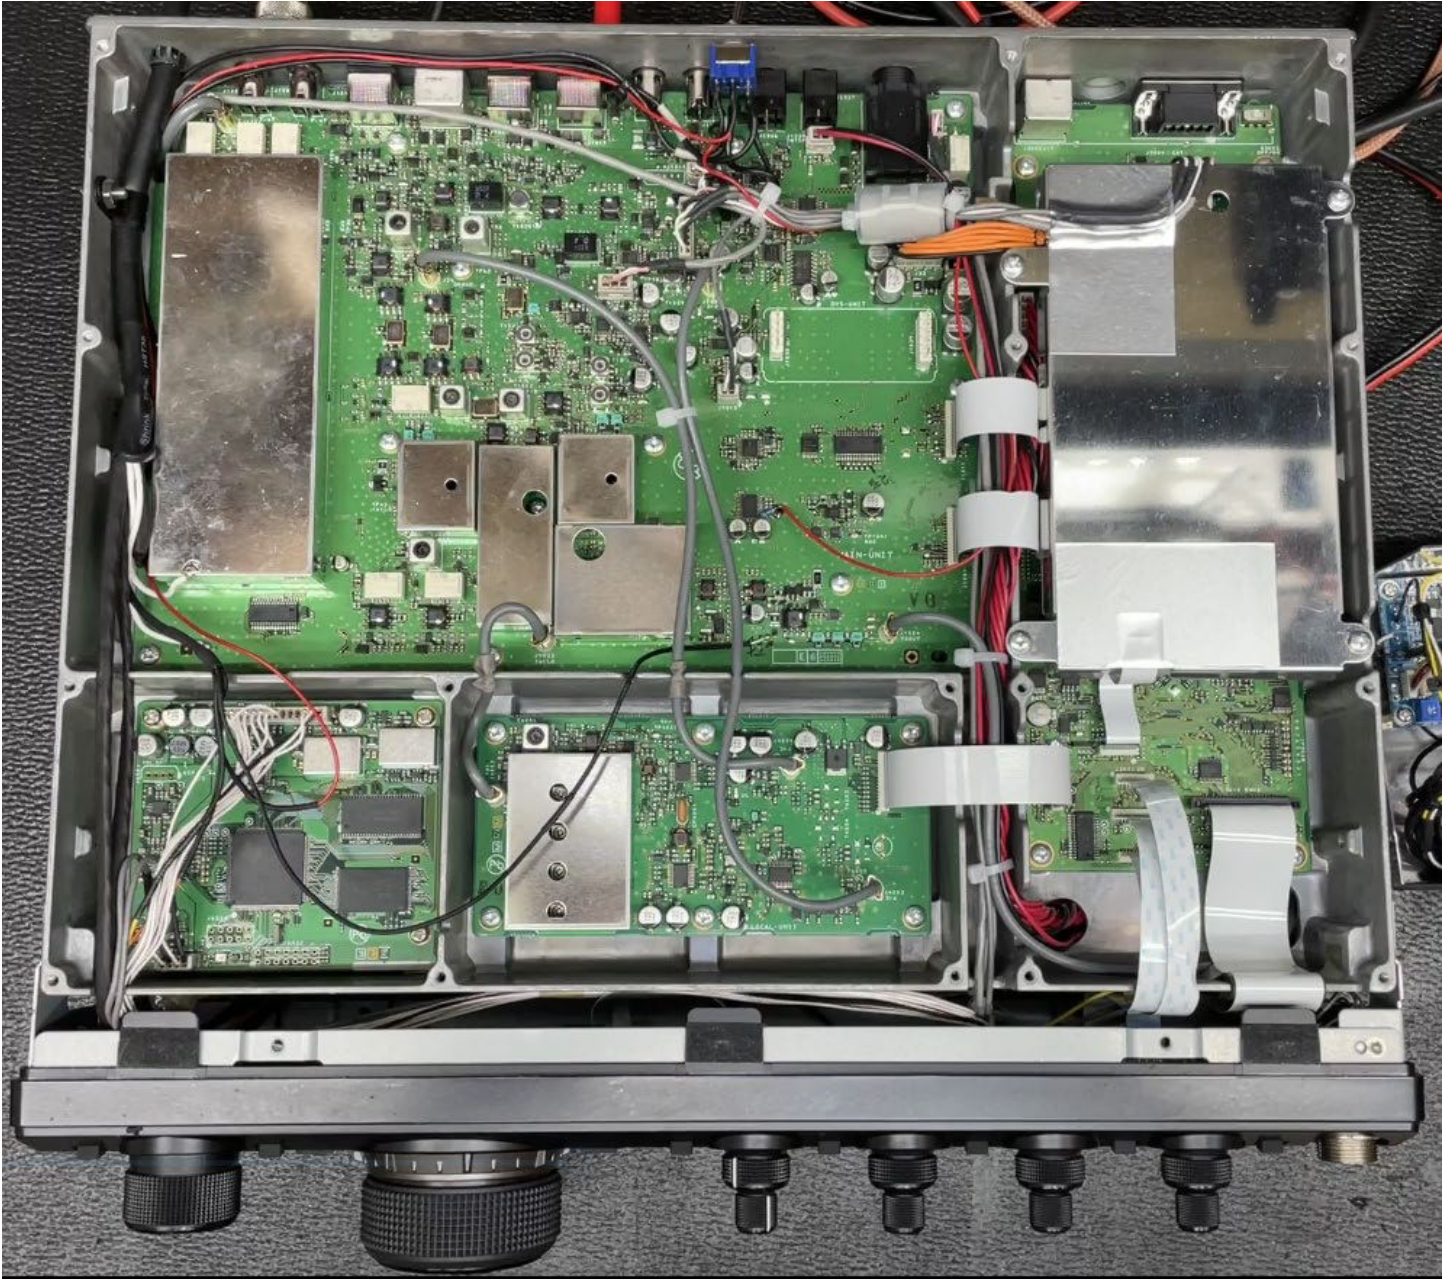

On the

43 OHM

2K

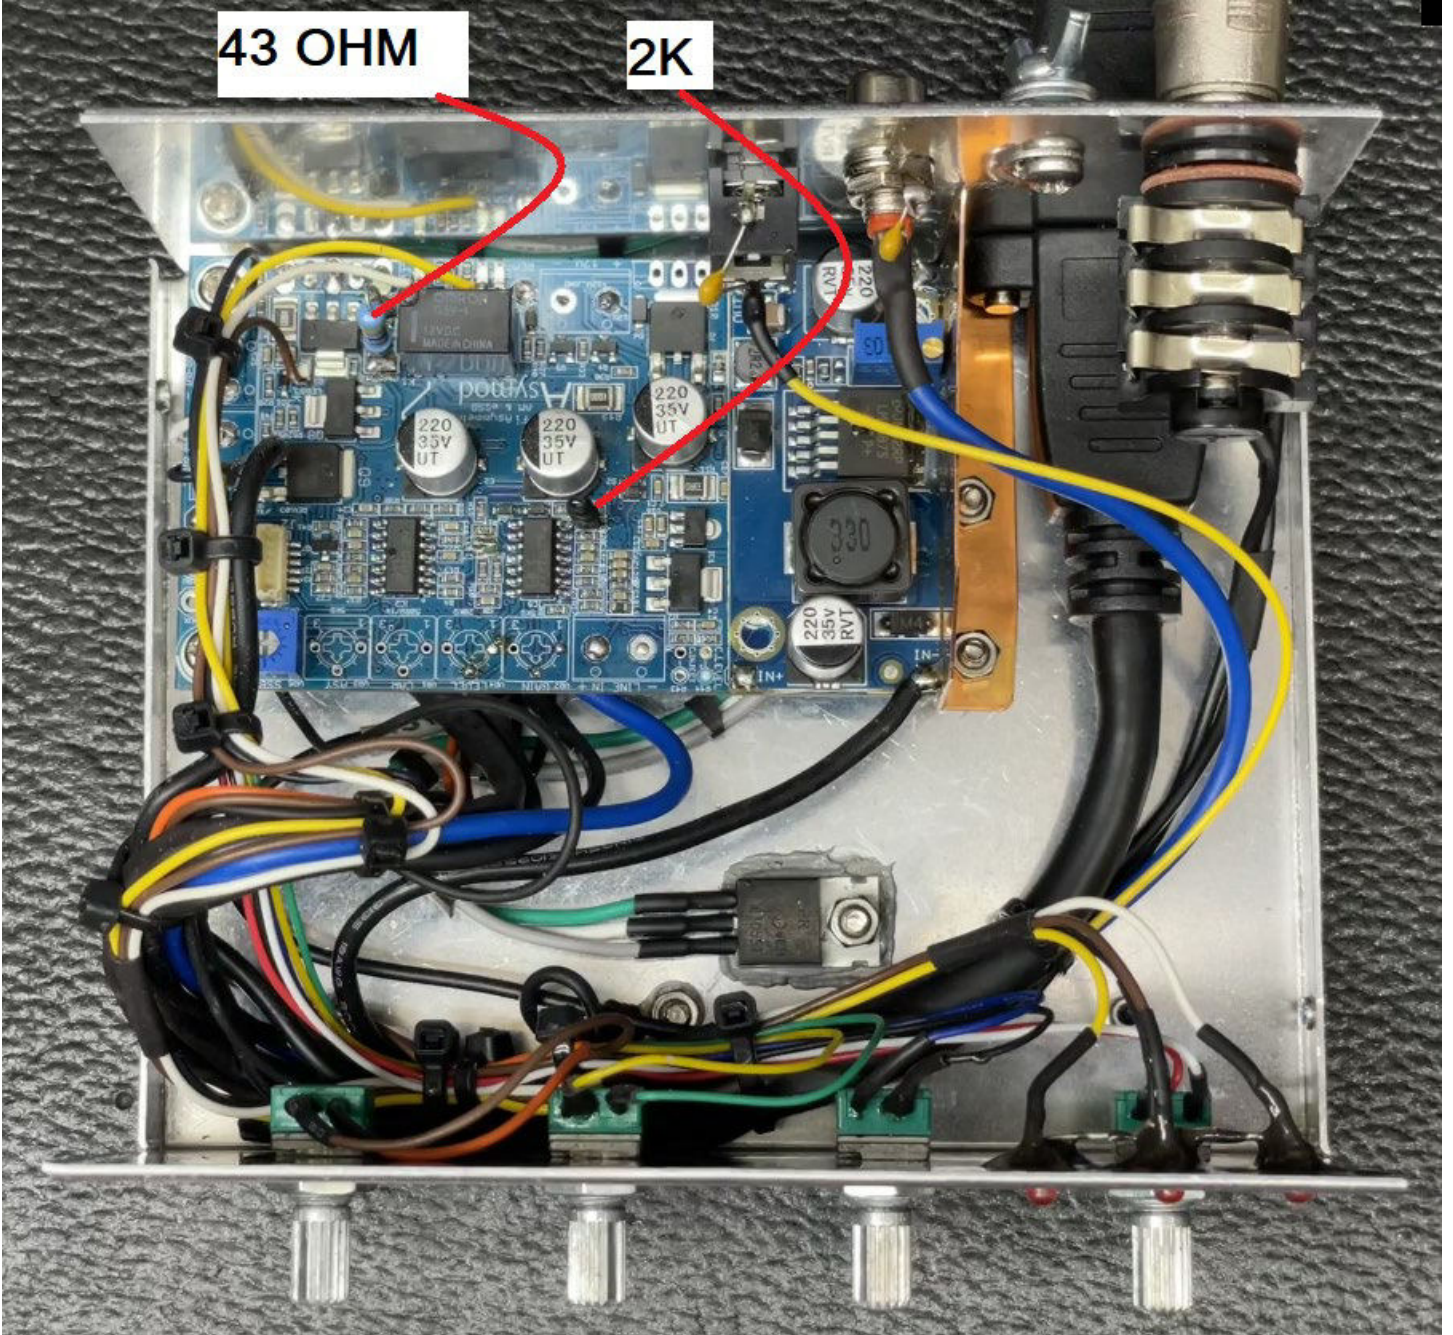

FTDX 1200, go to the advanced menu:

Press the 1.8 , 3.5, & 7.0 band buttons while powering up.

Go to the 100W setting for each of the bands and set to max. Press the MENU button for two seconds to save settings.

10-03 100w TXG 1.8 for 160 meters

16-03 100w TXG 21 for 15 meters

11-03 100w TXG 3.5 for 80 meters

17-03 100w TXG 24 for 12 meters

12-03 100w TXG 7 for 40 meters

18-03 100w TXG 28 for 10 meters

13-03 100w TXG 10 for 30 meters

Last. Go to menu 20-02, AM TX-CAR AM and set to MAX (around 38)

14-03 100w TXG 14 for 20 meters

15-03 100w TXG 18 for 17 meters

Asymod products are available at www.asymod.am

Customer support: asymod@asymod.am

“Asymod” is a registered trademark and may not be reproduced or used by any means or in any form whatsoever.