


FT-3000

Expansion Range

140 MHz - 174 MHz TX, 110-180 MHz, 300-520 MHz, 800-999 MHz (cellular blocked) RX


Remember that the electronic circuits can only tune a 20-30 MHz window around the original center frequency (tuned at the factory) you may have better performance at the top or the bottom ends of the tuneable range.

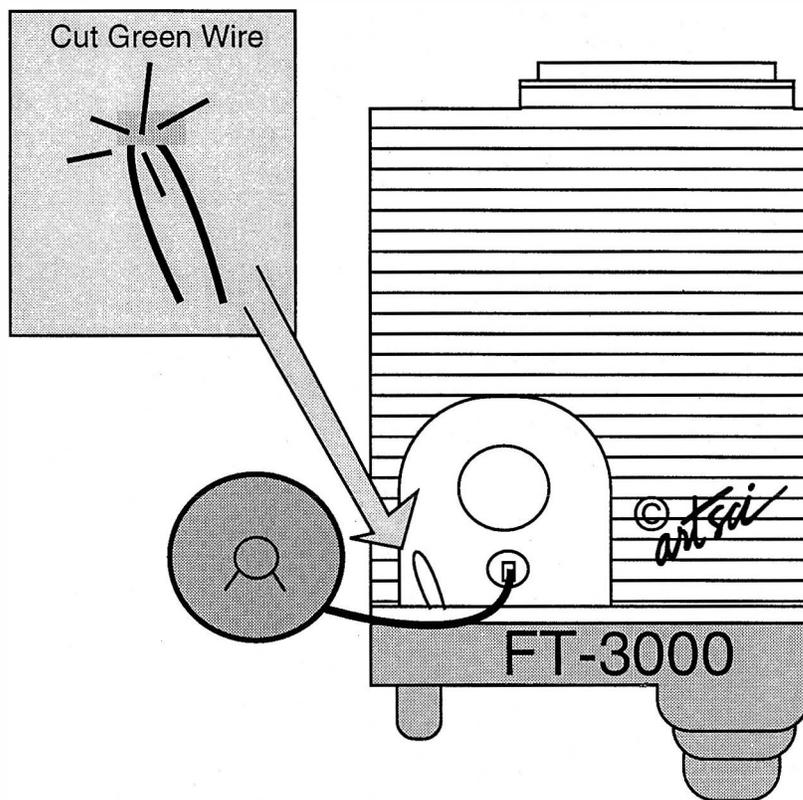

Expanded RF Modification

1. Remove Power and Antenna .
2. Remove seven screws from the top cover.
3. Remove the top cover
4. Locate and lift the speaker away from the heatsink.
5. **Locate and cut green wire loop.** (tape end to prevent shorting)
6. Reassemble the radio
7. Replace tPower and antenna.
8. Press and hold the [VFO/MR] and [F1] buttons and turn the radio on.

Radio/Tech Modifications Volume B



© artsci

Photocopies are a violation of copyright law. © artsci inc. all rights reserved. Have the original book with you when you call with a question. **Use at your own Risk!**

The Author and all other parties take no responsibility for any damages or violations caused by these modifications. Some modifications may violate FCC rules.

(818) 843-4080 12-4 PST • www.artscipub.com • artsci@artscipub.com