

It's easy to make a wide band scanner of your DR-620E:

By remove the cover, you see a blue wire. Cut this wire and reset your TRX (PWR-on + FUNC).

Now you get the following frq. range:

VHF range:

76-108 mhz wfm only RX

108-136 mhz AM only RX

136-174 mhz FM RX and TX

UHF range:

400-480 Mhz FM RX and TX

800-999 Mhz FM RX

334-400 Mhz FM RX

To switch between bands use F and the CALL keys.

You can RX also on every band in AM by holding the F and pressing the LOCK keys.


Showoff display:

Use pwr onn together with V/M button, stop it by pwr on/off

73

Bert Plaum, PA3ENH

1. Open the cover of the main unit and locate the CPU just behind the left side corner.
2. Locate a jumper wire marked JP3 on the circuit board near the CPU.

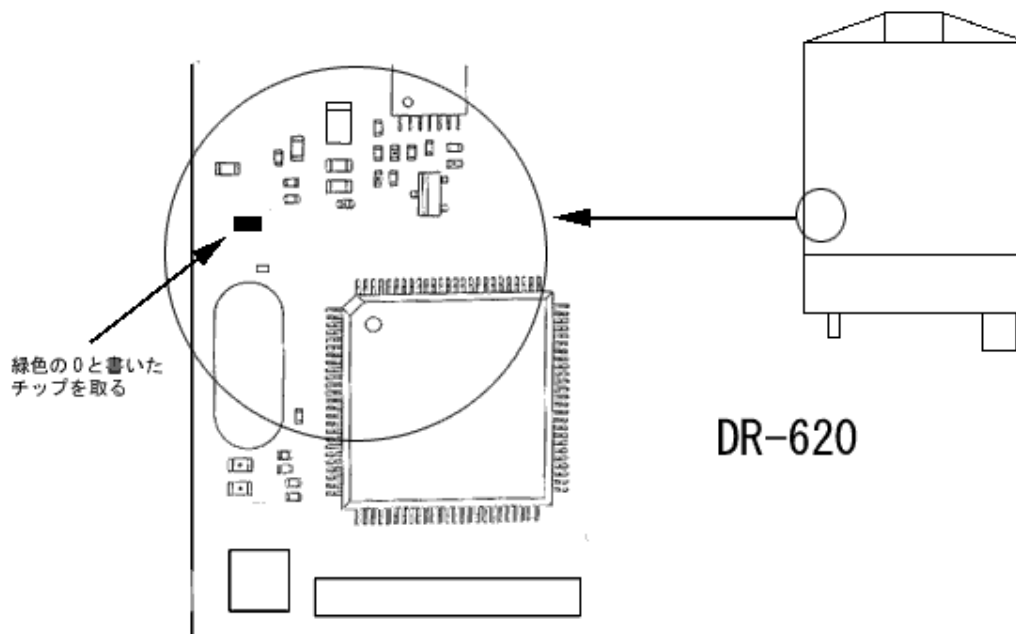

3. Cut the jumper wire, remove it and reassemble the radio.
4. Reset CPU by holding in the F key while powering the radio on.