

CH. SELECT

FIX VFO RIT

LOAD \rightarrow METER

IP RF
ALC HV

PLATE

DRIVE

LOAD RIT

DX PULL ON
MIC \rightarrow CAR

AF GAIN \rightarrow RF GAIN

TRIO SSB TRANSCEIVER

SEND H. SW VOX NB OFF

REC OFF MAN OFF SLOW FAST

MIC

TUN CW USB LSB

PHONES

MODE

JJY/WWV

ON OFF

TS-520D

ON OFF


RIT

BAND

FUNCTION

POWER


ON

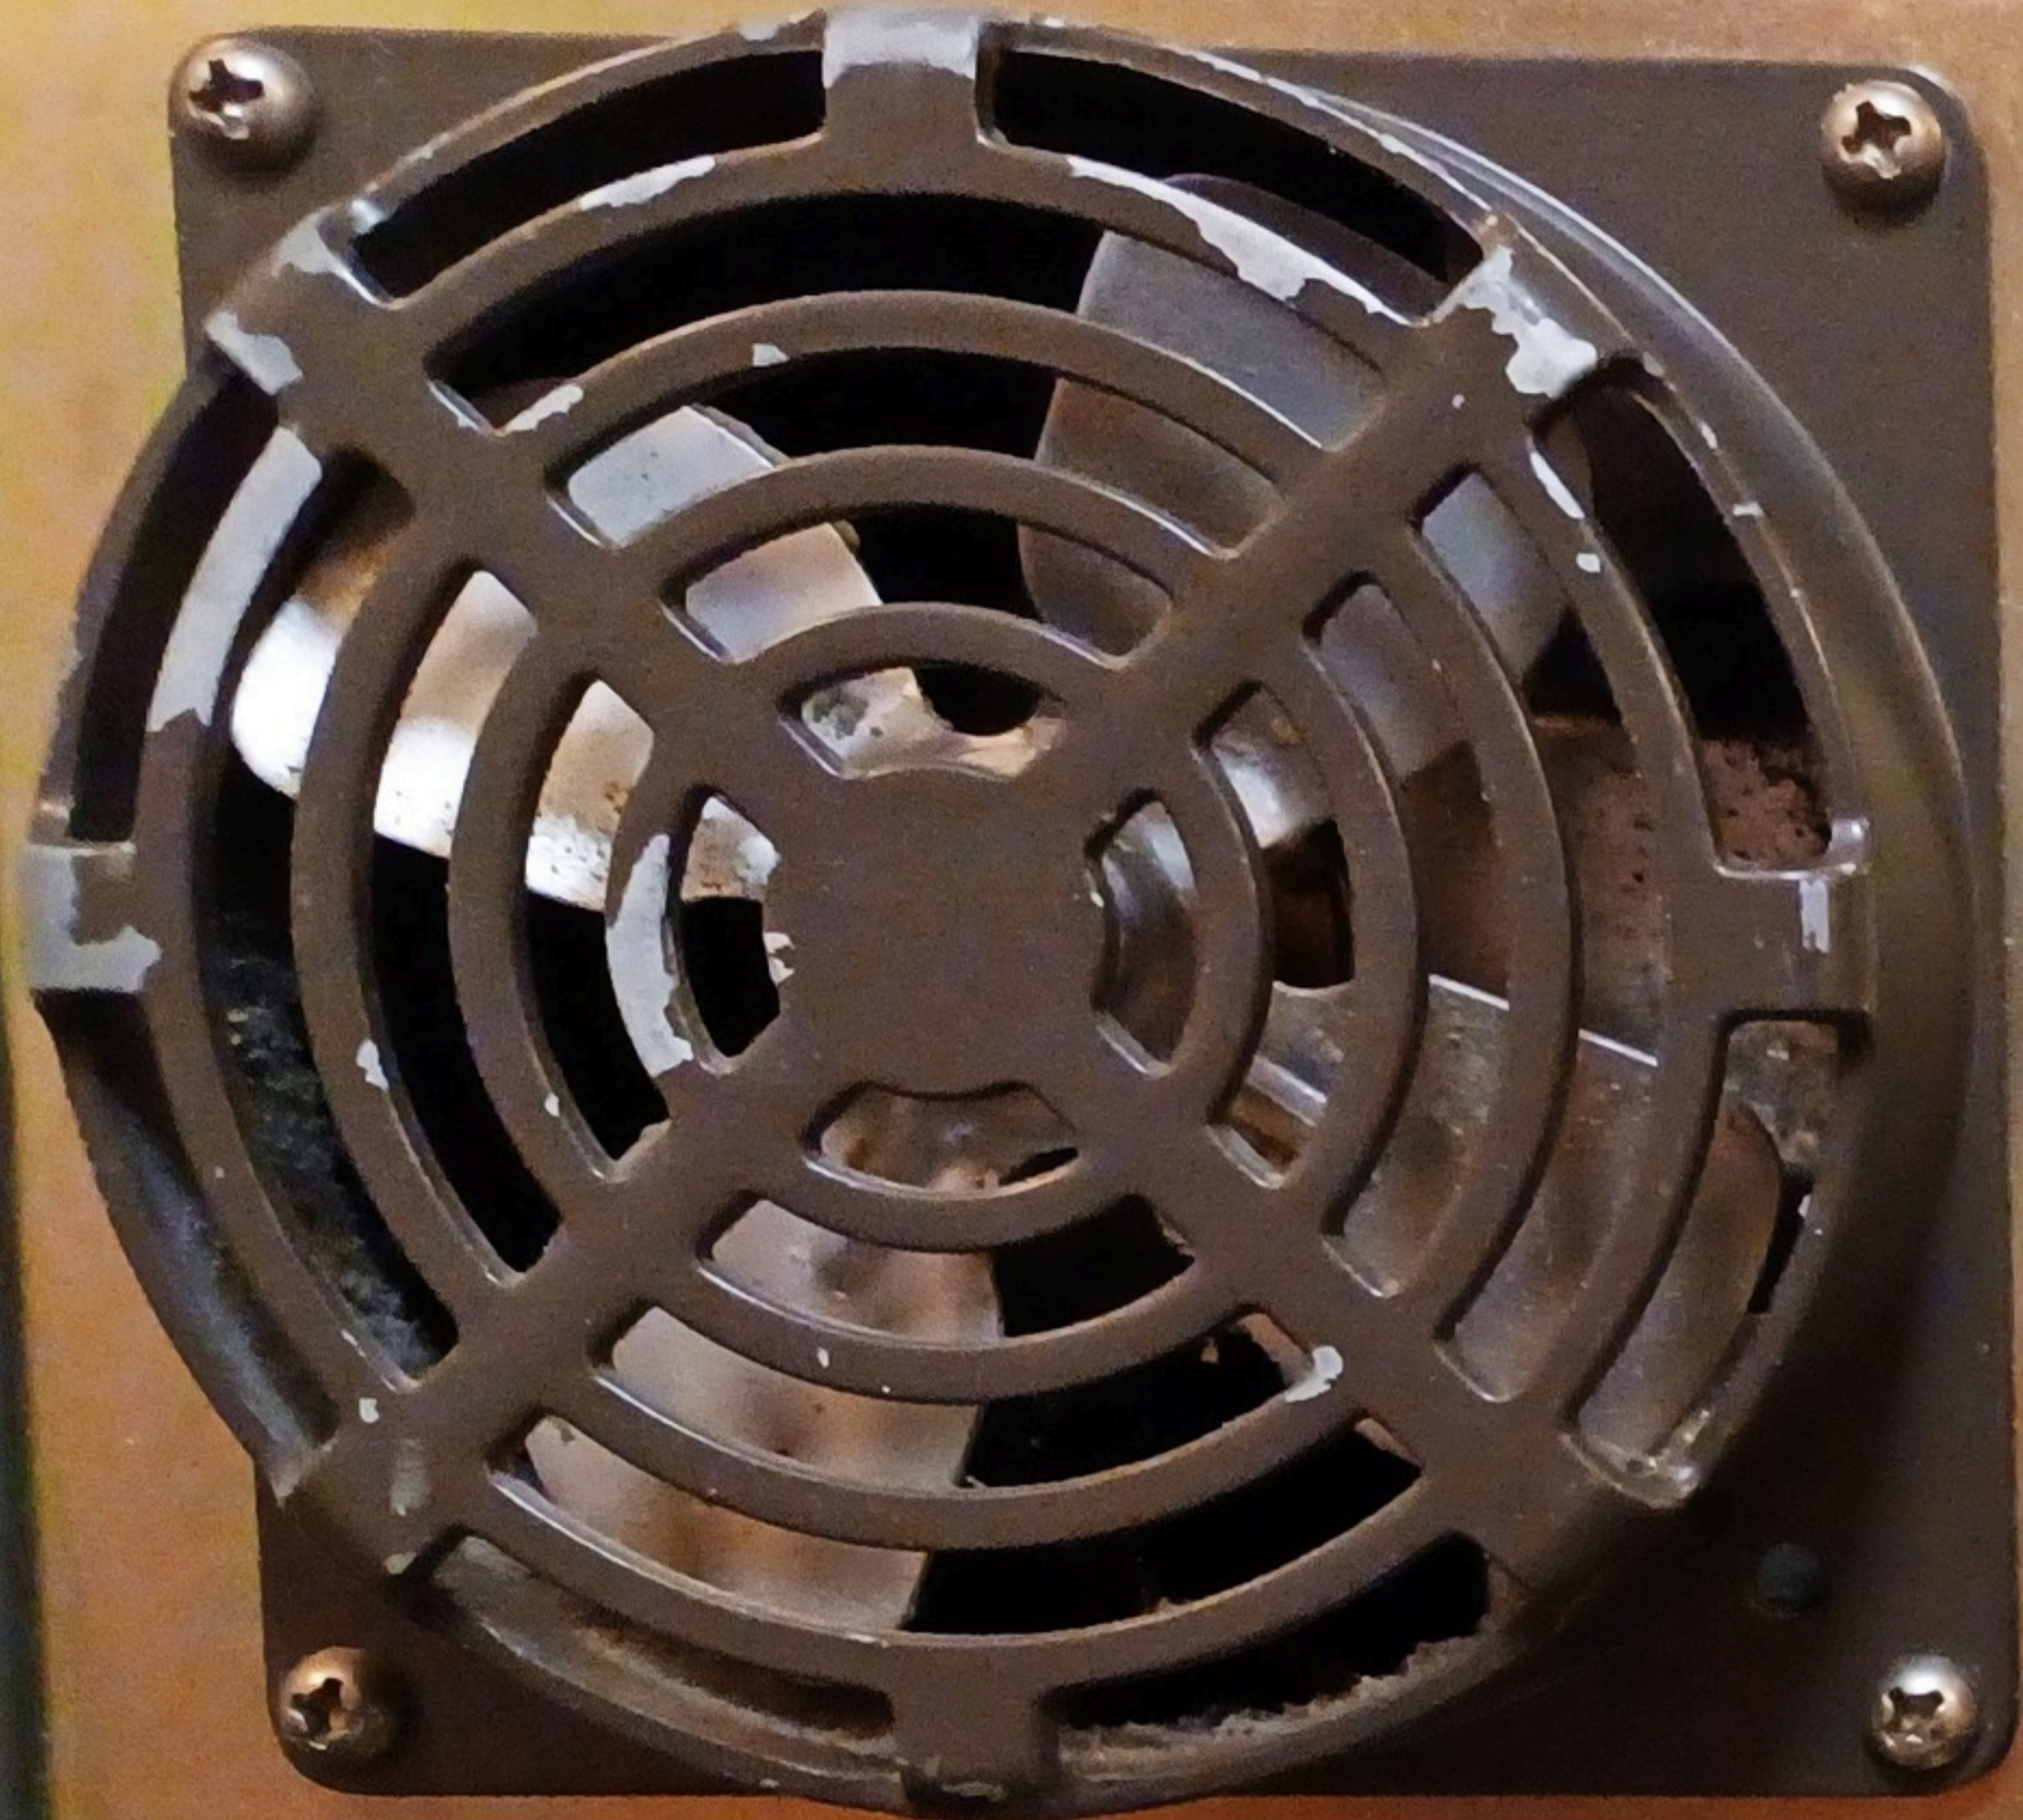

TRIO
MODEL
TS-520D
SSB
TRANSCEIVER


SERIAL NO.
430138

HF - Abschwächung

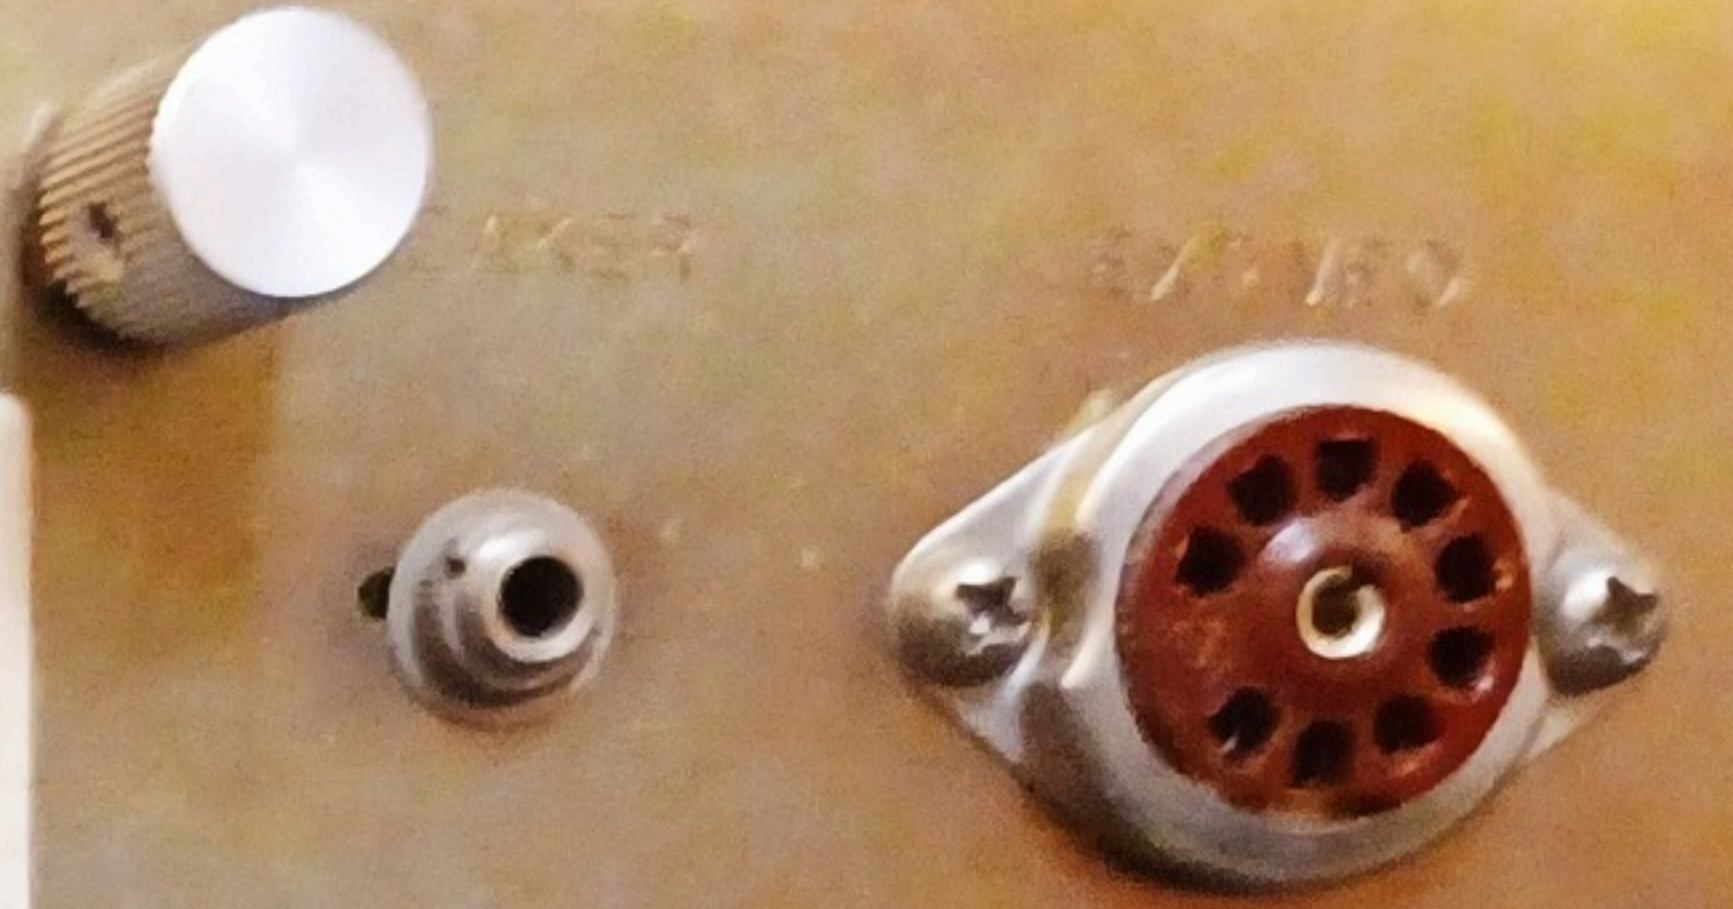

ANT

FUSE
D 6A
X 4A

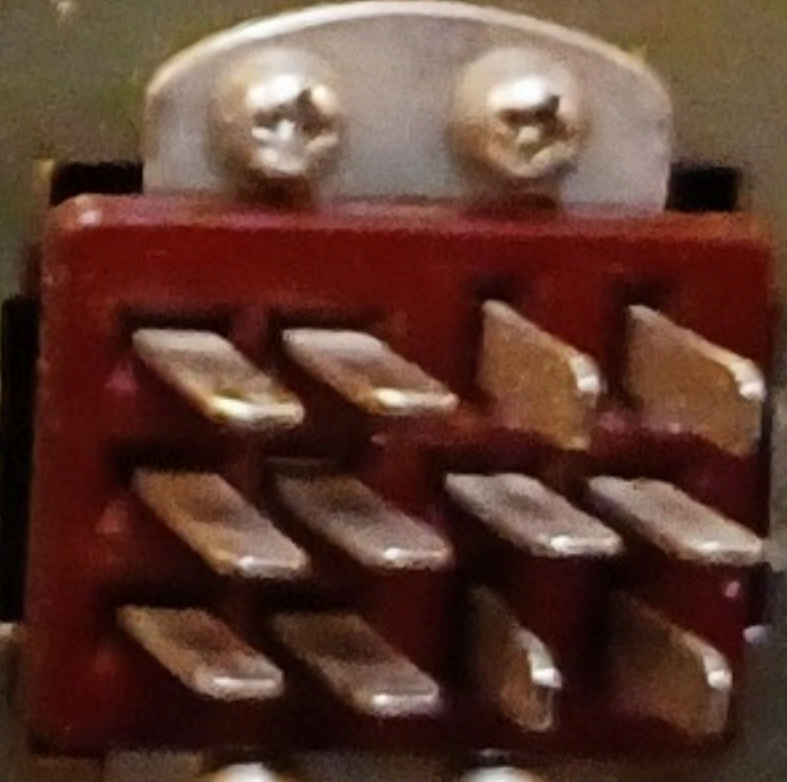

DC 198V
AC 100V



1.5RTER

JAPAN

SG SW
ON



INVERTER
OUT



INVERTER





TRIO SSB TRANSCEIVER

TS-520X

SEND H. SW VOX NR OFF
REC OFF FAST
SLOW

MIC TUN CW USB LSB
PHONES MODE JJY/WWV
ON OFF

LOAD METER PLATE DRIVE
IP RF RF HV
ALC HV
LOAD RIT
DX PULL ON MIC CAR
AF GAIN RF GAIN

RIT BAND FUNCTION POWER
ON OFF
14 7 3.5 21 28 28.5 29.1
25 kHz VFO VFO.R
RMT FIX.R
FIX FIX
CAL

この回路図はシリアルナンバー150000から適用されます。

