

Reliable Straight Forward HF Communications



100 W Output Power in a Durable Body

Powerful 100 W output provides the talk power you need to reach distant locations. Its one-piece, die-cast aluminum construction provides stability even at high duty cycles.

Simple Operation with Easy-to-Read LCD

The IC-78 is equipped with a large, easy-to-read LCD screen. A minimum number of buttons and knobs provide direct function access without the need for a secondary key function.

Prompt Operation with Memory Channels

Operating frequencies can be saved as memory channels. Each memory channel can be named with up to eight characters in the name. Additionally, you can enter frequencies directly or use the VFO mode*.
*VFO mode is available, depending on the transceiver version.

Front Mounted Speaker

With the speaker facing to the operator, you can clearly hear received audio during operation. The IC-78 provides more than 2 W audio output. Received voice can be heard in noisy environments.

And more

- Five user selectable IF filter widths
- Microphone Compressor increases average talk power
- VOX capability for hands-free operation
- RIT, Preamp and Attenuator functions
- Noise Blanker function reduces pulse type noise
- IF Shift for interference rejection
- CW mode and RTTY mode operation
- Scan function
- Built-in antenna tuner control circuit
- Data cloning between transceivers



SPECIFICATIONS

GENERAL		
Frequency range	Receiver	0.030 ~ 29.999999 MHz*1
	Transmitter	1.600 ~ 29.999999 MHz*2
*1 Guaranteed range: 0.5 ~ 29.999999 MHz. *2 Not guaranteed for some frequency bands.		
Modes	USB, LSB, CW, RTTY (FSK), AM	
Number of memory channels	99 (Duplex) +1 (Call channel)	
Frequency stability	Less than ±200 Hz from 1 min. ~ 60 min. after power ON. Less than ±30 Hz/hour at +25°C (+77°F) 1 hour later after power ON. Less than ±350 Hz between 0°C ~ +50°C (+32°F ~ +122°F)	
Power supply requirement	13.8 V DC ±15 % (Negative ground)	
Current drain (at 13.8 V DC)	Rx Max. audio Stand by	2.0 A 1.3 A
	Tx Max. power	21.0 A
Operating temperature range	-10°C ~ +60°C, +14°F ~ +140°F	
Antenna connector	SO-239 (50 Ω)	
Dimensions (Projections not included)	240 (W) × 95 (H) × 239 (D) mm, 9.4 (W) × 3.7 (H) × 9.4 (D) in	
Weight (Approximate)	3.8 kg, 8.4 lb	
TRANSMITTER		
Output power	SSB, CW, RTTY	2 ~ 100 W
	AM	2 ~ 35 W
Spurious emissions	Less than -46 dB below peak output power	
Carrier suppression	More than 40 dB	
Unwanted sideband	More than 50 dB	
Microphone connector	8-pin connector (600 Ω)	
RECEIVER		
Sensitivity (10 dB S/N)	SSB, CW, RTTY	0.16 μV (1.600 ~ 29.999999 MHz) (0.5 μV at 12 dB SINAD)
	AM	13 μV (0.5 ~ 1.599999 MHz) 2 μV (1.600 ~ 29.999999 MHz)
Selectivity	SSB, CW, RTTY	More than 2.1 kHz/-6 dB Less than 4.5 kHz/-60 dB
	AM	More than 6.0 kHz/-6 dB Less than 20 kHz/-40 dB
Spurious and image rejection ratio	More than 70 dB (1.600 ~ 29.999999 MHz)	
Audio output power (at 13.8 V DC)	More than 2.0 W at 10% distortion with an 8 Ω load	
PHONES connector	3-conductor 6.5 (d) mm (1/4")	
External speaker connector	2-conductor 3.5 (d) mm (1/8") / 8 Ω	

All stated specifications are subject to change without notice or obligation.

Supplied accessories:		
• Hand microphone	• DC power cable	• Spare fuses

Icom Inc. 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

Icom America Inc.
www.icomamerica.com

Icom Canada
www.icomcanada.com

Icom Brazil
E-mail: sales@icombrasil.com

Icom (Europe) GmbH
www.icomeurope.com

Icom Spain S.L.
www.icomspain.com

Icom (UK) Ltd.
www.icomuk.co.uk

Icom France s.a.s.
www.icom-france.com

OPTIONAL ACCESSORIES

DESKTOP MICROPHONES



SM-50
Dynamic microphone. Includes [UP] / [DOWN] switches and low cut function.



SM-30
Compact, lightweight electric microphone.



SM-27
Dynamic microphone with PTT lock switch.

HAND MICROPHONE EXTERNAL SPEAKER AUTOMATIC TUNING ANTENNA



HM-219
Same as supplied.




SP-41
Front mounted headphone jack.

AUTOMATIC ANTENNA TUNER FOLDED DIPOLE ANTENNA



AT-140
Covers 1.6 ~ 30 MHz with a 7 m (23 ft) or longer wire antenna. AT-130/E is also available.



AH-710
Covers 1.9 ~ 30 MHz bands.




AH-740
Covers 2.5 ~ 30 MHz. OPC-2321 is required.

OTHER OPTIONS

- OPC-599 ACC 13 PIN CABLE ADAPTER
- OPC-2321 CONTROL CABLE FOR AH-740 6 m (19.6 ft)
- MB-23 CARRYING HANDLE
- MB-118 MOBILE BRACKET

Some options may not be available in some countries. Please ask your dealer for details.

REAR PANEL VIEW

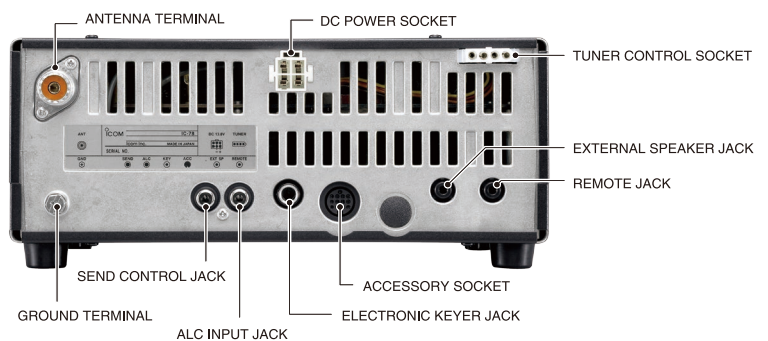

Icom and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries.

Icom Inc. 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icomjapan.com

Icom America Inc.
www.icomamerica.com

Icom Canada
www.icomcanada.com

Icom Brazil
E-mail: sales@icombrasil.com

Icom (Europe) GmbH
www.icomeurope.com

Icom Spain S.L.
www.icomspain.com

Icom (UK) Ltd.
www.icomuk.co.uk

Icom France s.a.s.
www.icom-france.com

Icom (Australia) Pty. Ltd.
www.icom.net.au

Icom Asia Co., Ltd.
www.icomasia.com

Your local distributor/dealer: