

IC-F1610 IC-F2610



The photo shows actual size.

Versatile, multi-function PMR

- **Keypad with backlighting and dot matrix, multi-function display**

The keypad on the front panel allows direct input of memory channels, DTMF codes, tone frequencies and SmarTrunk II™ codes. Backlighting ensures smooth input even during nighttime operation. The display shows a wide variety of information at a glance. In addition to various icons, 2 lines of dot matrix characters (of up to 16 characters per line) show important operating status items such as channel number, programmable key functions, etc., depending on programming.

- **Superior receiver performance**

Improved, high-performance IMD characteristics.

- **Flash ROM CPU**

- **Detachable front panel***

The detachable front panel provides installation flexibility and is easy to install in a number of vehicle types.


*Optional RMK-1 and OPC-609 are required.

- **Selectable channel spacing**

(channel independent)

- **Optional RS-232C interface***

*Based on RS-232C; ask your local dealer for details.

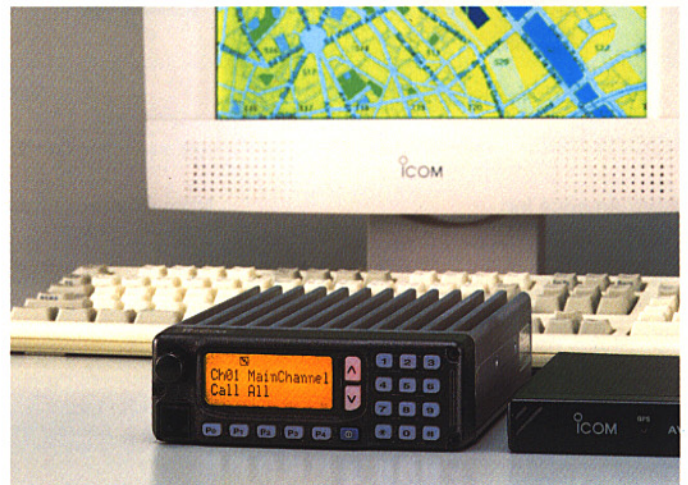

ADDITIONAL FEATURES

- Rugged, dependable construction
- 7 customizable keys available
- Built-in CTCSS, DTCS encoder/decoder
- 5-tone encoder/decoder standard (depending on version)
- Numerous 5-tone formats available
- Answer back function for 5-tone signalling
- SmarTrunk II™ compatible with optional UT-105
- Ample 128 memory channels; can be expanded to 256 with optional EX-1761
- Password function to prevent unauthorized operation
- Maintenance-free EEPROM for memory backup
- Adjustable minimum AF level
- 51 CTCSS frequencies plus 1 programmable
- Selectable DTCS polarity
- Time-out timer, TOT penalty timer and TOT ID transmission

- Hanger function
- Normal and priority scan
- 10 scan channel groups and 2 priority channels
- 10 DTMF autodialing memories
- Temporary simplex operation on a duplex channel capability (talk around function)
- Transmit lockout (channel busy/repeater/reverse repeater)
- Automatic priority channel selection and/or receive mute release when microphone is picked up
- Powerful, external speaker (optional for some versions)
- 3 selectable transmit output powers—High, Low-2 and Low-1
- Optional AVL (Automatic Vehicle Location) system capability
- Advanced programming for PC/AT; Microsoft® Windows® 95
Microsoft and Windows are registered trademarks of Microsoft Corporation in the U.S.A. and other countries.

SPECIFICATIONS

GENERAL

- Frequency coverage (Varies according to versions):
IC-F1610 136–155 MHz 146–174 MHz
IC-F2610 400–430 MHz 440–490 MHz
490–520 MHz
- Number of channels : 128 or 16 ch × 8 banks
256 or 16 ch × 16 banks; with
EX-1761
- Type of emission : 8K50F3E (12.5 kHz; narrow)
16K0F3E (25 kHz; wide)
- PLL channel step : 5 kHz, 6.25 kHz and 7.5 kHz
- Frequency stability : ±1500 Hz
- Operating temp. range : -20°C to +55°C
- Power supply voltage: 13.2 V DC (negative ground)
- Current drain (typical):
Tx at 25 W 5.0 A (IC-F1610)
6.0 A (IC-F2610)
Rx max. audio 0.8 A
standby 400 mA
- Antenna connector : SO-239 (50 Ω)
- Dimensions : 150(W) × 50(H) × 180(D) mm
- Weight : 1.5 kg

TRANSMITTER

- Output power : 25 W or 10 W
(at 13.2 V DC) (according to country)
- Modulation system : Variable reactance frequency
modulation
- Max. freq. deviation : ±2.5 kHz (narrow)
±5.0 kHz (wide)
- Spurious emissions : 0.25 μW
- Adjacent ch. power : 60 dB (narrow)
70 dB (wide)
- Audio harmonic dist. : 5% at 40% deviation
- Residual modulation : 50 dB typical (narrow)
(with CCITT filter) 55 dB typical (wide)
- Mic. connector : 8-pin modular (600 Ω)

RECEIVER

- Intermediate freq. : 1st 21.75 MHz (IC-F1610)
30.875 MHz (IC-F2610)
2nd 455 kHz
- Sensitivity : -2 dBμV (emf; at 20 dB SINAD)
- Squelch sensitivity :
IC-F1610 -6 dBμV (emf; threshold)
IC-F2610 -4 dBμV (emf; threshold)
- Adj. ch. selectivity : 60 dB (narrow)
70 dB (wide)
- Spurious response : 70 dB
- Intermodulation : 70 dB typical
- Audio output power : 3.5 W at 10% distortion with a
4 Ω load
- Ext. SP connector : 2-conductor 3.5 (d) mm/4 Ω

Measurements made in accordance with ETS 300 086.
All stated specifications are subject to change without notice or obligation.

Supplied Accessories

- Hand microphone
 - DC power cable
 - Mounting bracket kit
 - External speaker*
 - Fuses
- *depending on version

OPTIONS

- **EX-1761 MEMORY EXPANSION UNIT**
- **OPC-617 ACC CABLE**
For external terminal connection.
- **RMK-1 SEPARATION KIT**
+ **OPC-609 SEPARATION CABLE**
For separate front panel installation (1.9 m).
- **UT-96 5-TONE UNIT**
Provides the transceiver with 5-tone decoder capabilities (supplied with some versions).
- **UT-105 SmarTrunk II™ Logic Board***
*SmarTrunk II™ is a trademark of SmarTrunk Systems Inc.
- **UT-103 FFSK BOARD**

- **SM-25 DESKTOP MICROPHONE**
- **SP-10/SP-22 EXTERNAL SPEAKERS**
- **AV-100C AVL SYSTEM CONTROLLER**
+ **OPC-821 AVL SYSTEM CABLE**
- **OPC-822 INTERFACE CABLE**
- **HM-100TN DTMF MICROPHONE**



Icom Inc.

1-1-32, Kamiminami, Hirano-ku, Osaka 547-0003, Japan Phone: 06 6793 5302 Fax: 06 6793 0013 URL: <http://www.icom.co.jp/world/index.html>

Count on us!

Icom America Inc.

<Corporate Headquarters>
2380 116th Avenue N.E., Bellevue, WA 98004, U.S.A.
Phone : (425) 454-8155 Fax : (425) 454-1509
URL : <http://www.icomamerica.com>
<Customer Service> Phone : (425) 454-7619

Icom Canada

Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone : (604) 952-4266 Fax : (604) 952-0090
URL : <http://www.icomcanada.com>

Icom (Australia) Pty. Ltd.

A.B.N. 88 006 092 575
290-294 Albert Street, Brunswick, Victoria, 3056, Australia
Phone : 03 9387 0666 Fax : 03 9387 0022
URL : <http://www.icom.net.au>

Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road, Taipei, Taiwan, R.O.C.
Phone : (02) 2559 1899 Fax : (02) 2559 1874

Icom (Europe) GmbH

Communication Equipment
Himmelgeister Str. 100, D-40225 Düsseldorf, Germany
Phone : 0211 346047 Fax : 0211 333639
URL : <http://www.icomeurope.com>

Icom Spain S.L.

Ctra. de Gracia a Manresa Km. 14,750
08190 Sant Cugat del Valles Barcelona, SPAIN
Phone : (93) 590 26 70 Fax : (93) 589 04 46
URL : <http://www.icomspain.com>

Icom (UK) Ltd.

Unit 9, Sea St., Herne Bay, Kent, CT6 8LD, U.K.
Phone : 01227 741741 Fax : 01227 741742
URL : <http://www.icomuk.co.uk>

Icom France S.a

Zac de la Plaine, Rue Brindejonc des Moulinais
BP 5804, 31505 Toulouse Cedex, France
Phone : 561 36 03 03 Fax : 561 36 03 00
URL : <http://www.icom-france.com>



Certificate Number Q14190

Icom Inc. (Japan), is an
ISO9001 certification
acquired company.

Your local distributor/dealer: