




MICROPHONE PREAMPLIFIER Model MPA-1

TECHNICAL BULLETIN 205-5220

- *Solid State*
- *Flat Response*
- *Output Level Metering*
- *Minimum Noise*
- *Wide Dynamic Range*

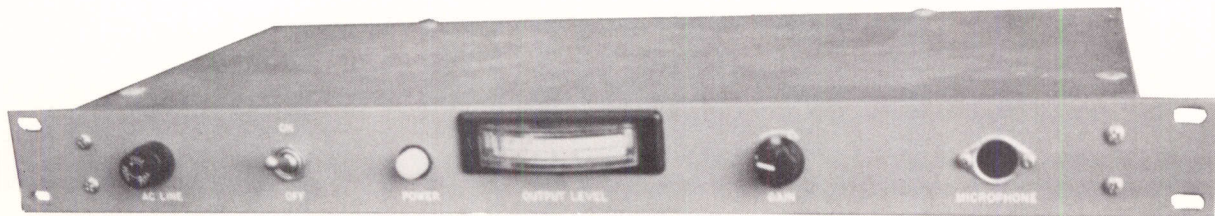

The Model MPA-1 microphone preamplifier is a solid state amplifier unit, providing low distortion microphone preamplification with front panel manual gain control and output level monitoring.

A six-pin microphone input connector, located on the front panel, with rear panel jumper-wire patching adapts the input to operate with carbon, low impedance or high impedance microphones.

Push-to-talk and 600 ohm output terminals are provided on the rear panel.

The Model MPA-1 is particularly useful in those installations where the radio transmitter is located at a considerable distance from the operating position.

THE TECHNICAL MATERIEL CORPORATION

TECHNICAL SPECIFICATIONS MPA-1

OPERATING PARAMETERS

MICROPHONE INPUTS Carbon, crystal, high impedance dynamic or low impedance dynamic
OUTPUT LEVEL Adjustable to 0 dbm
OUTPUT IMPEDANCE 600 ohms, balanced

AUDIO PARAMETERS

FREQUENCY RESPONSE 300 to 3000 Hz \pm 3db
DISTORTION Minimum of 40 db below 0 dbm
HUM AND NOISE Minimum of 50 db below 0 dbm

SPECIAL FEATURES

METERING Front panel meter provides continuous monitoring of the audio output level.

ENVIRONMENTAL AND INSTALLATION

COOLING Convection
OPERATING CONDITIONS 0° to 50°C. Up to 90% relative humidity at MSL.
STORAGE CONDITIONS -30° to + 75°C. Up to 90% relative humidity at MSL.
PRIMARY POWER 115 or 230 volts AC \pm 10%, 47 to 400 Hz, single-phase, 10 watts
SIZE AND WEIGHT 1.75" (4.4cm) high x 19" (48.3cm) wide x 8.75" (22.2cm) deep
6 pounds, 2.7 kg installed
SHIPPING DATA Commercial packing for U.S. shipment. Special packing available at additional cost.
One (1) container — 22" x 19" x 8". Weight/cube — 10 lbs./2 cu. ft.
LOOSE ITEMS Technical manual (2) and mating signal connectors.

ACCESSORY PRODUCTS are described in sections 4-9 of the General Catalog and include RF/antenna, terminal, data, connector and power equipment. **TECHNICAL SERVICES** in design, engineering, training, and related areas are described in section 10. **OPTIONS** are listed after each TMC product in part A of the Price List.

Technical Specifications Are Subject to Change Without Notice

THE TECHNICAL MATERIEL CORPORATION

700 FENIMORE ROAD, MAMARONECK, NEW YORK 10543 U.S.A.
CABLE: TEPEI TEL.: 914-698-4800 TWX: 710-566-1100 TLX: 137-358

TMC (CANADA) LIMITED

TMC INTERNATIONAL

RR NO. 5, OTTAWA, K1G 3N3, ONTARIO, CANADA
TEL.: 613-521-2050 TLX: 053-4146