

ICOM

INSTRUCTIONS


FLUSH MOUNT MB-70

Thank you for purchasing the **MB-70 FLUSH MOUNT**. The MB-70 allows you to install the IC-M710RT into the cabin console of your boat.


Please read these instructions thoroughly before mounting the transceiver with the MB-70.

INSTALLATION


- ① Using the supplied template, measure and cut a hole into the surface where the remote control unit is to be mounted.
- ② Stretch the rubber seal completely around the edges of the remote control unit.

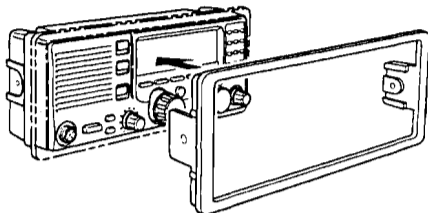


- ③ Slide the control unit and attached rubber seal into the mount plate.

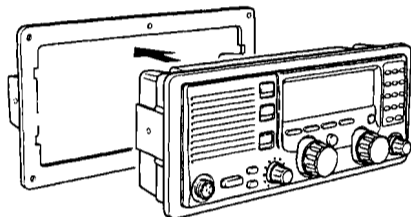


- ④ Make sure the nipples on the rubber seal line up with the corresponding openings on the mount plate.

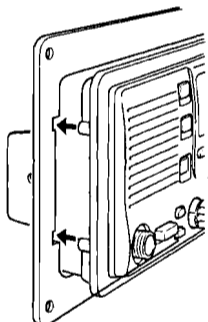

- ⑤ Using your thumbs and forefingers, squeeze the rubber seal and mount plate together at all points so that they are 'flush.'

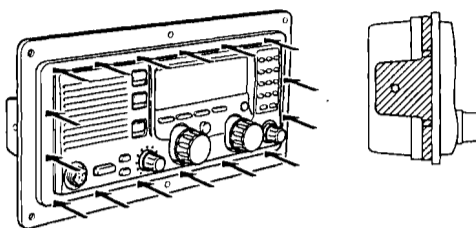

- ⑥ Secure the assembly using the supplied mounting bolts and washers.



- ⑦ Place the remote control unit and attached flush mount into the hole prepared in step ①.
- ⑧ Carefully mark off the 6 spots where the screws/bolts will be fastened; then, remove the remote control unit and flush mount.
- ⑨ Drill holes at these marks.
- ⑩ Install the remote control unit using the flush mount and tighten with screws or bolts.

UNPACKING

	Qty.
① Mounting plate	1
② Rubber seal	1
③ Mounting bolts (M5x20)	2
④ Spring washers (M5)	2
⑤ Flat washers (M5)	2

Icom Inc.
6-9-16 Kamihigashi, Hirano-ku, Osaka 547-0002 Japan

Count on us!

A-8314G-1EX-① Printed in Japan
© 1998 by Icom Inc.

MB-70 ERRATUM

The supplied template was wrong, please use this template instead.

M 710

