


Rack & Panel

M Series

High Voltage Miniature / #20 Contacts / .040" Dia. / 7.5 Amps




M4PLSH10
Plug with lock spring and hood



M4SLRGN
Receptacle with lock ring, ground lug and nut



M10SLRN
Receptacle with lock ring and nut




M10PLSH19
Plug with lock spring and hood




N
Nylon Nut



M12SLS12
Receptacle with lock spring



M12P
Plug

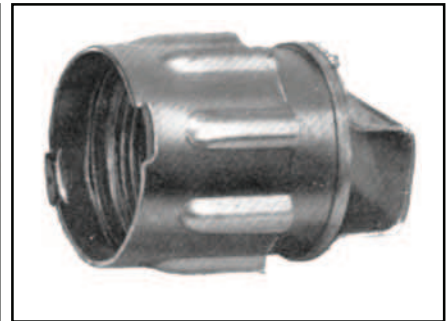

M12H
Hood with lock shell

The extreme compactness and lightweight of M connectors make them ideal for such applications as strain gauges, telemetry and pressure pick-up installations in aircraft, portable equipment and instrumentation.

SPECIFICATIONS

Current Rating: 7.5 amps

No. of Contacts: 4, 5, 7, 9, 10, 12

Pin Contacts: .040 dia. brass, gold plated

Socket Contacts: Spring temper phosphor bronze, gold plated

Terminations: .048 dia. solder cup accepts up to #20 AWG stranded wire. M12 - .043 dia. solder cup accepts up to #20 AWG stranded wire.

Electrical Data: The dielectric withstanding voltage is one minute electrification at 1500 VAC. (2250 VAC for M12).

Dielectric: Brown mineral filled diallyl phthalate. Also available in gray glass filled diallyl phthalate, per MIL-M-14, SDG-F.

Polarization: Body design permits engagement in proper position only.

Mounting: For 1/16" panel mounting of either plug or receptacle use cadmium plated brass nut for M4-10, nylon nut for M12. Add "N" to code number.

Lock Ring (and lock spring): May be applied to plug or receptacle to stop connector rotation on panel. When engaged with lock spring, prevents accidental disconnection due to vibration, etc.

Ground Lug: Can be used to ground any of the 4 contacts on M4 connector. Add "G" to code number.

Hood: Anodized aluminum or brown mineral filled diallyl phthalate hoods may be applied to plug or receptacle of M4-M10. With or without cable clamps to provide additional strain relief for the cable.

Winchester

62 Barnes Industrial Road North, Wallingford, Connecticut 06492 Phone:(203)741-5400 Fax:(203)741-5500 www.winchesterelectronics.com




Rack & Panel

M Series


High Voltage Miniature / #20 Contacts / .040" Dia. / 7.5 Amps

OUTLINE


Dimensions are for reference only and are subject to change. Outline drawings on request.





M21S




Panel Drilling





Receptacle M4S-LRGN



Plug M4P-LS




Receptacle M5S-LRN




Plug M5P-LS


Accessory Code
 LR — Lock Ring
 LS — Lock Spring
 N — Nut & Lockwasher to be used as suffixes when required.




Panel Drilling (Viewed from Front of Panel)




Contact Arrangement M5S



Contact Arrangement M7S



Contact Arrangement M9S



Contact Arrangement M10S

Contact locations are shown from terminal sides

NOTE: Contact arrangement of M*P are reversed

* Insert number, indicating number of contacts (5, 7, 9, 10)

PHYSICAL AND ELECTRICAL DATA

Catalog Number	Number of Contacts	Weight In Ounces						Solder Cup Hole Dia./in.	Current Rating
		Plug	Rec.	Nut	Lock Spring	Lock Ring	Lock Washer		
M4P M4S	4	.08	.06	.08	.02	.02	.01	.048	7.5 amps
M5P M5S	5	.10	.08	.06	.02	.03	.01	.048	7.5 amps
M7P M7S	7	.12	.10	.06	.02	.03	.01	.048	7.5 amps
M9P M9S	9	.13	.10	.06	.02	.03	.01	.048	7.5 amps
M10P M10S	10	.13	.10	.06	.02	.03	.01	.048	7.5 amps
M12P M12S	12	.3	.4	.05	.02	.03	.01	.043	7.5 amps

Winchester

62 Barnes Industrial Road North, Wallingford, Connecticut 06492 Phone:(203)741-5400 Fax:(203)741-5500 www.winchesterelectronics.com

Rack & Panel

M Series

High Voltage Miniature / #20 Contacts / .040" Dia. / 7.5 Amps


MOLDED DIALLYL PHTHALATE AND ALUMINUM HOODS

Molded diallyl phthalate cable hoods protect soldered wires and facilitate disengagement of connectors. Cable clamps provide additional strain relief and support. They are supplied on hoods with "C" in the code number. Clamps are cadmium plated with olive drab iridite finish. Anodized aluminum

hoods are precision machined from bar stock to give greater strength than die cast units. Cable clamps are machined as an integral part of the connector. The set screw prevents accidental disassembly from vibration, etc. A polyethylene sleeve liner provides added insulation in the terminal area.

OUTLINE

Dimensions are for reference only and are subject to change. Outline drawings on request.

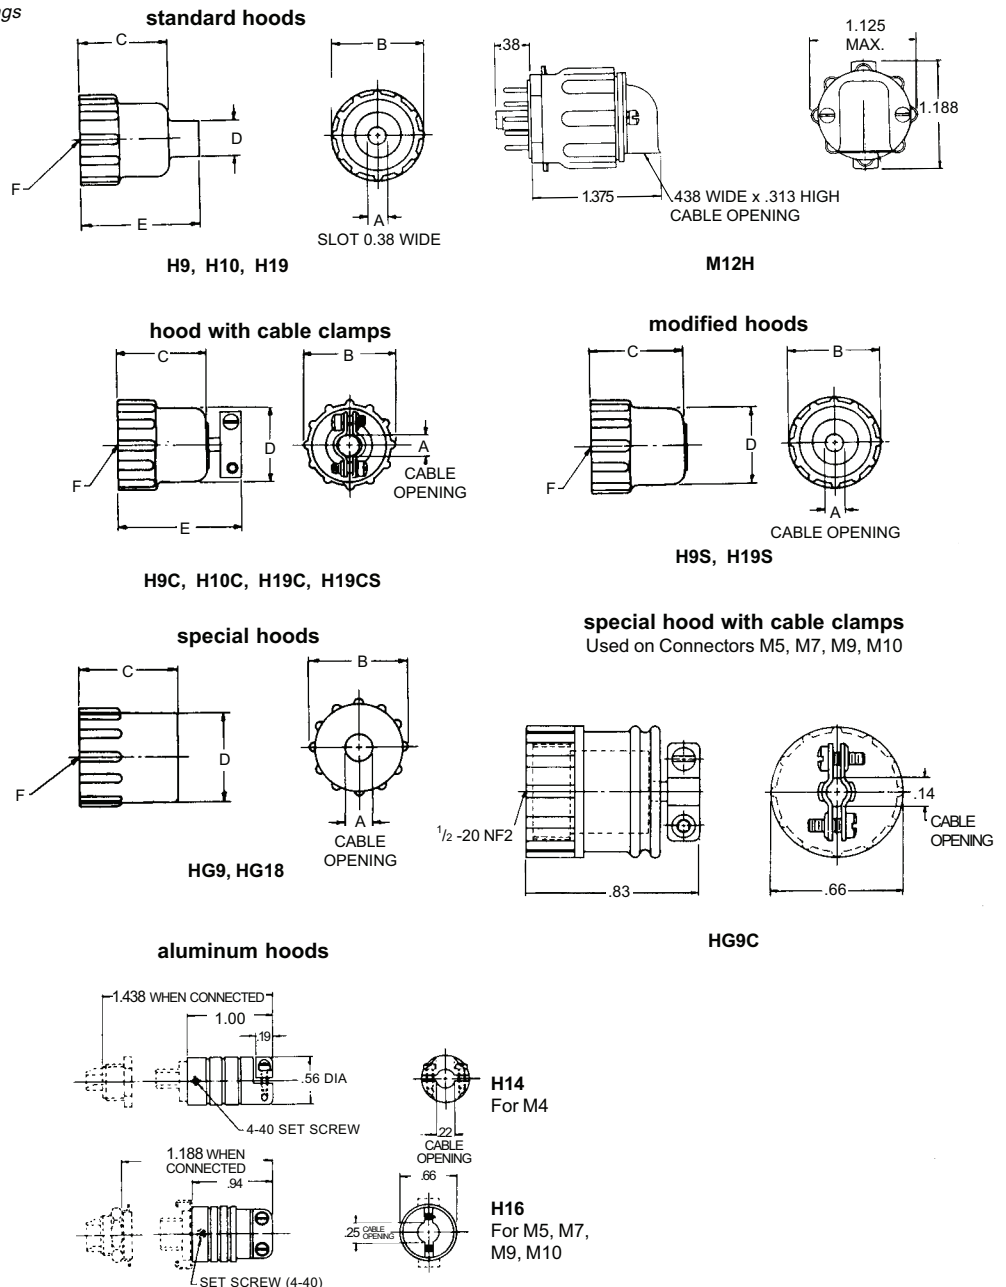

Winchester

62 Barnes Industrial Road North, Wallingford, Connecticut 06492 Phone:(203)741-5400 Fax:(203)741-5500 www.winchesterelectronics.com

Rack & Panel

M Series


High Voltage Miniature / #20 Contacts / .040" Dia. / 7.5 Amps

PHYSICAL DATA

Hood Code Number	Used on of Connectors	DIMENSIONS						Weight In Ounces
		A	B	C	D	E	F-Thds	
H9	M5, 7, 9, 10	.14	.66	.66	.27	.88	1/2 - 20	.10
H10	M4	.16	.56	.69	.25	.75	3/8 - 24	.05
H19	M5, 7, 9, 10	.30	.66	.66	.42	.88	1/2 - 20	.08
H9C	M5, 7, 9, 10	.16	.66	.78	.55	.97	1/2 - 20	.11
H10C	M4	.19	.56	.69	.44	.88	3/8 - 24	.09
H19C	M5, 7, 9, 10	.30	.66	.78	.55	.97	1/2 - 20	.12
H19CS	M5, 7, 9, 10	.30	.66	.66	.55	.86	1/2 - 20	.11
H9S	M5, 7, 9, 10	.14	.66	.66	.55		1/2 - 20	.07
H19S	M5, 7, 9, 10	.30	.66	.66	.55		1/2 - 20	.06
HG9	M5, 7, 9, 10	.22	.66	.66	.59		1/2 - 20	.10
HG18	M5, 7, 9, 10	.28	.66	.66	.59		1/2 - 20	.11
HG9C	M5, 7, 9, 10	See Drawing						.14
H14	M4	See Drawing						.25
H16	M5, 7, 9, 10	See Drawing						.25
H12H	M12	See Drawing						1.10

ORDERING INFORMATION

Omit steps not required

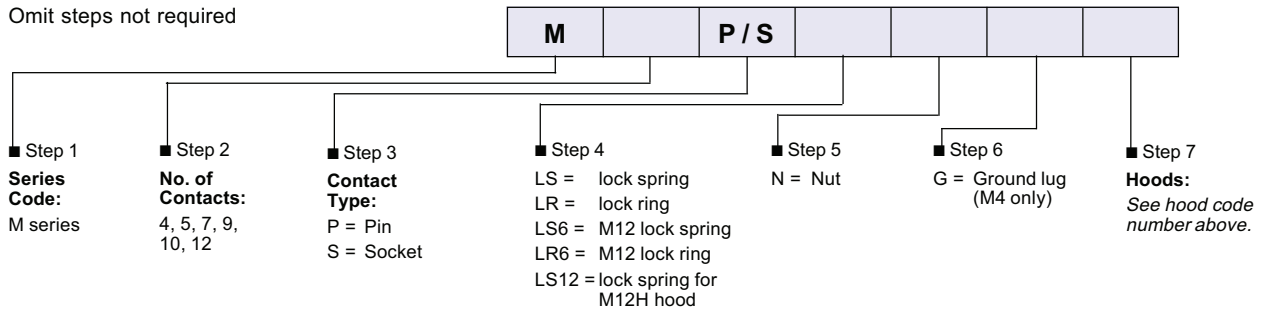

Winchester.

62 Barnes Industrial Road North, Wallingford, Connecticut 06492 Phone:(203)741-5400 Fax:(203)741-5500 www.winchesterelectronics.com