


NP4-12FR

12V

valve regulated
lead acid battery

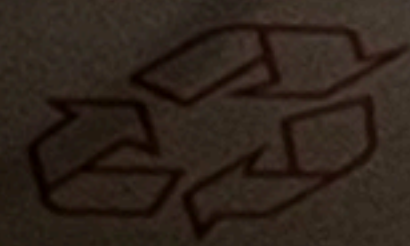

CAUTION
• AVOID SHORTING TERMINALS
• DO NOT CHARGE
IN A GAS TIGHT CONTAINER

Pb

www.yuasa.com

NON-SPILLABLE

(1r)uSDX

PA

F6EJU> 22
A 5.351.97 CW R
200
KBK TNXDR OM TON


Audio




DL2MAN / PE1NNZ

Mic/Key

Menu

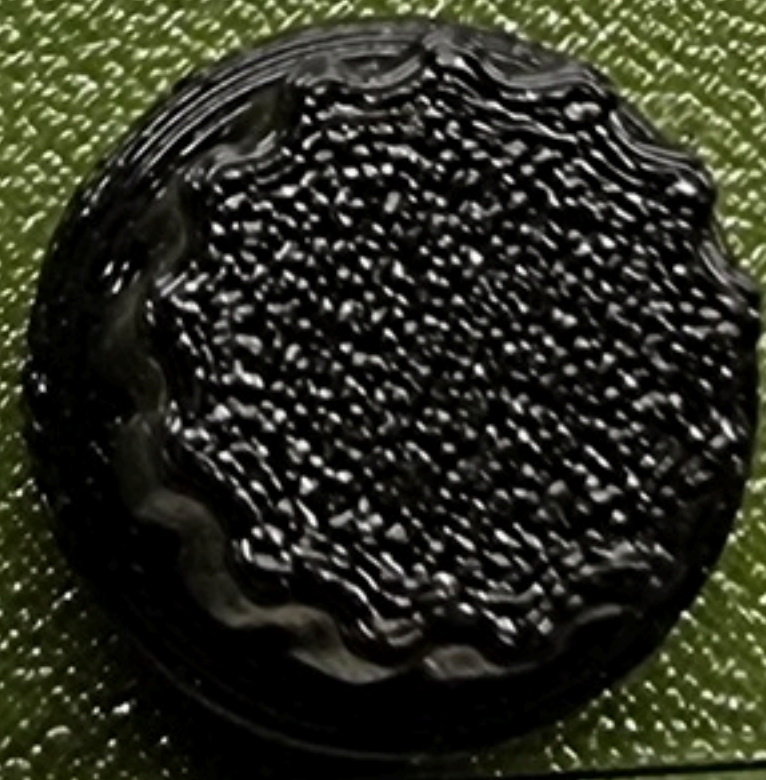

Enter



PTT



DC Power Connector
Outer \varnothing 3,5 mm
Inner \varnothing 1,3 mm

Min 7V
Max 16V
typ. 12-13,8V



Switched (Active Low)

GND

NC



3,5 mm Connector Stereo



Audio OUT

GND 3,5 mm Connector Stereo




GND 3,5 mm Connector Stereo

Mic / DAH / Audio IN





PTT / DIT (Mono Connector can be used
for Straight Key
then: Ring = GND and TIP = Key)

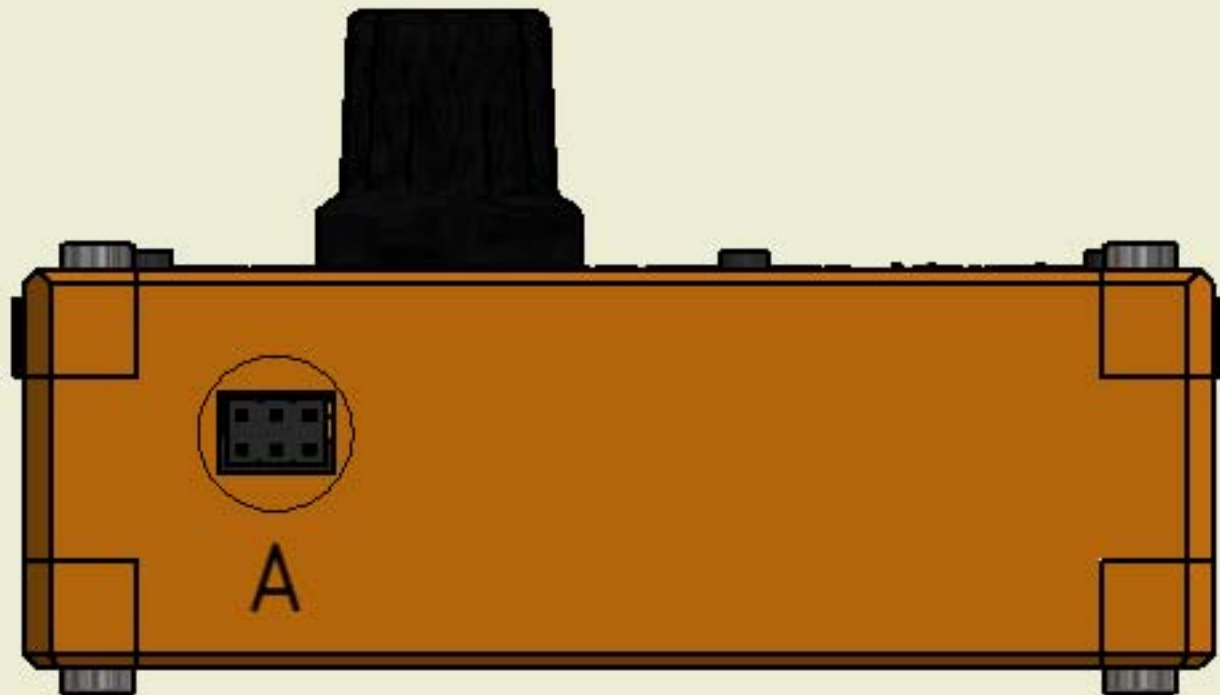

A (5 : 1)

Detail: ISP Connector

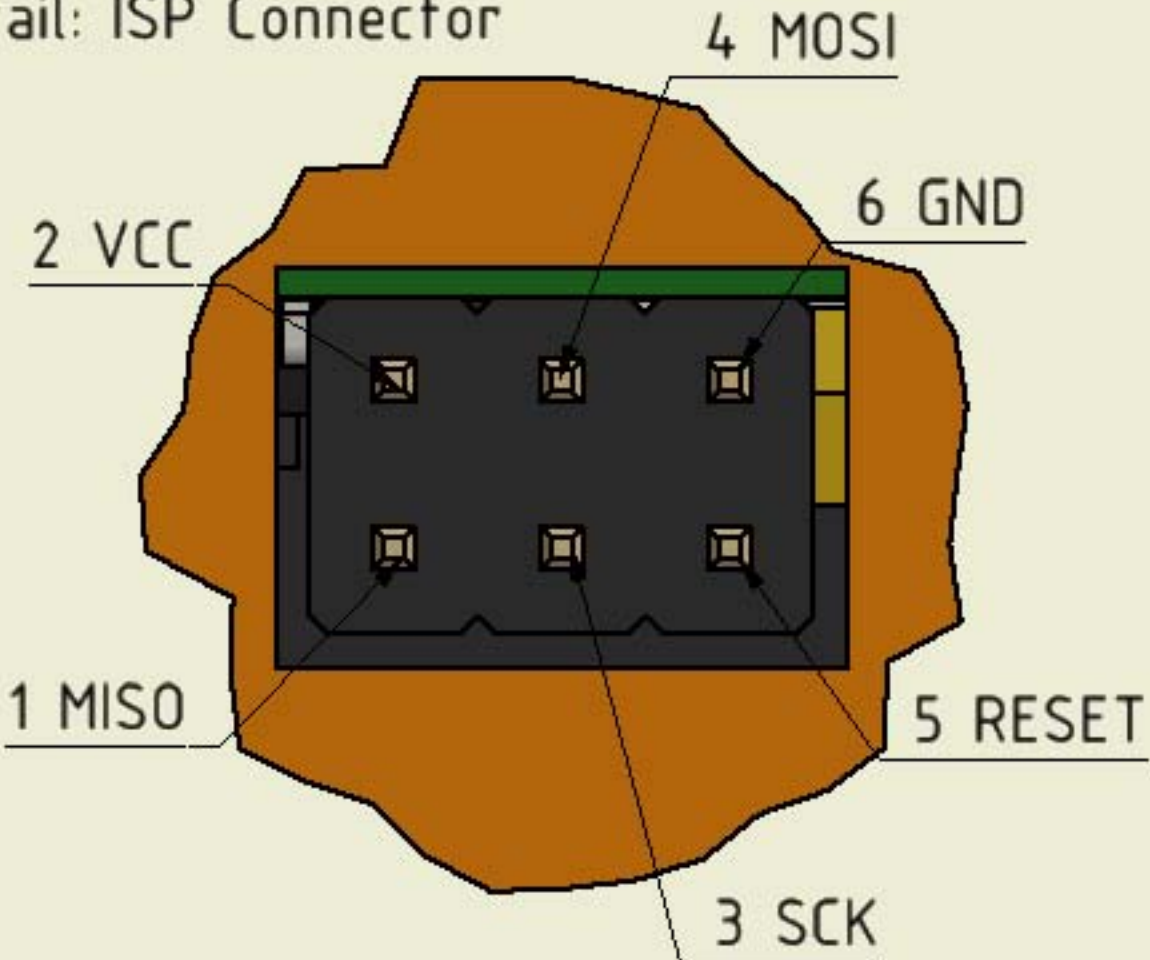

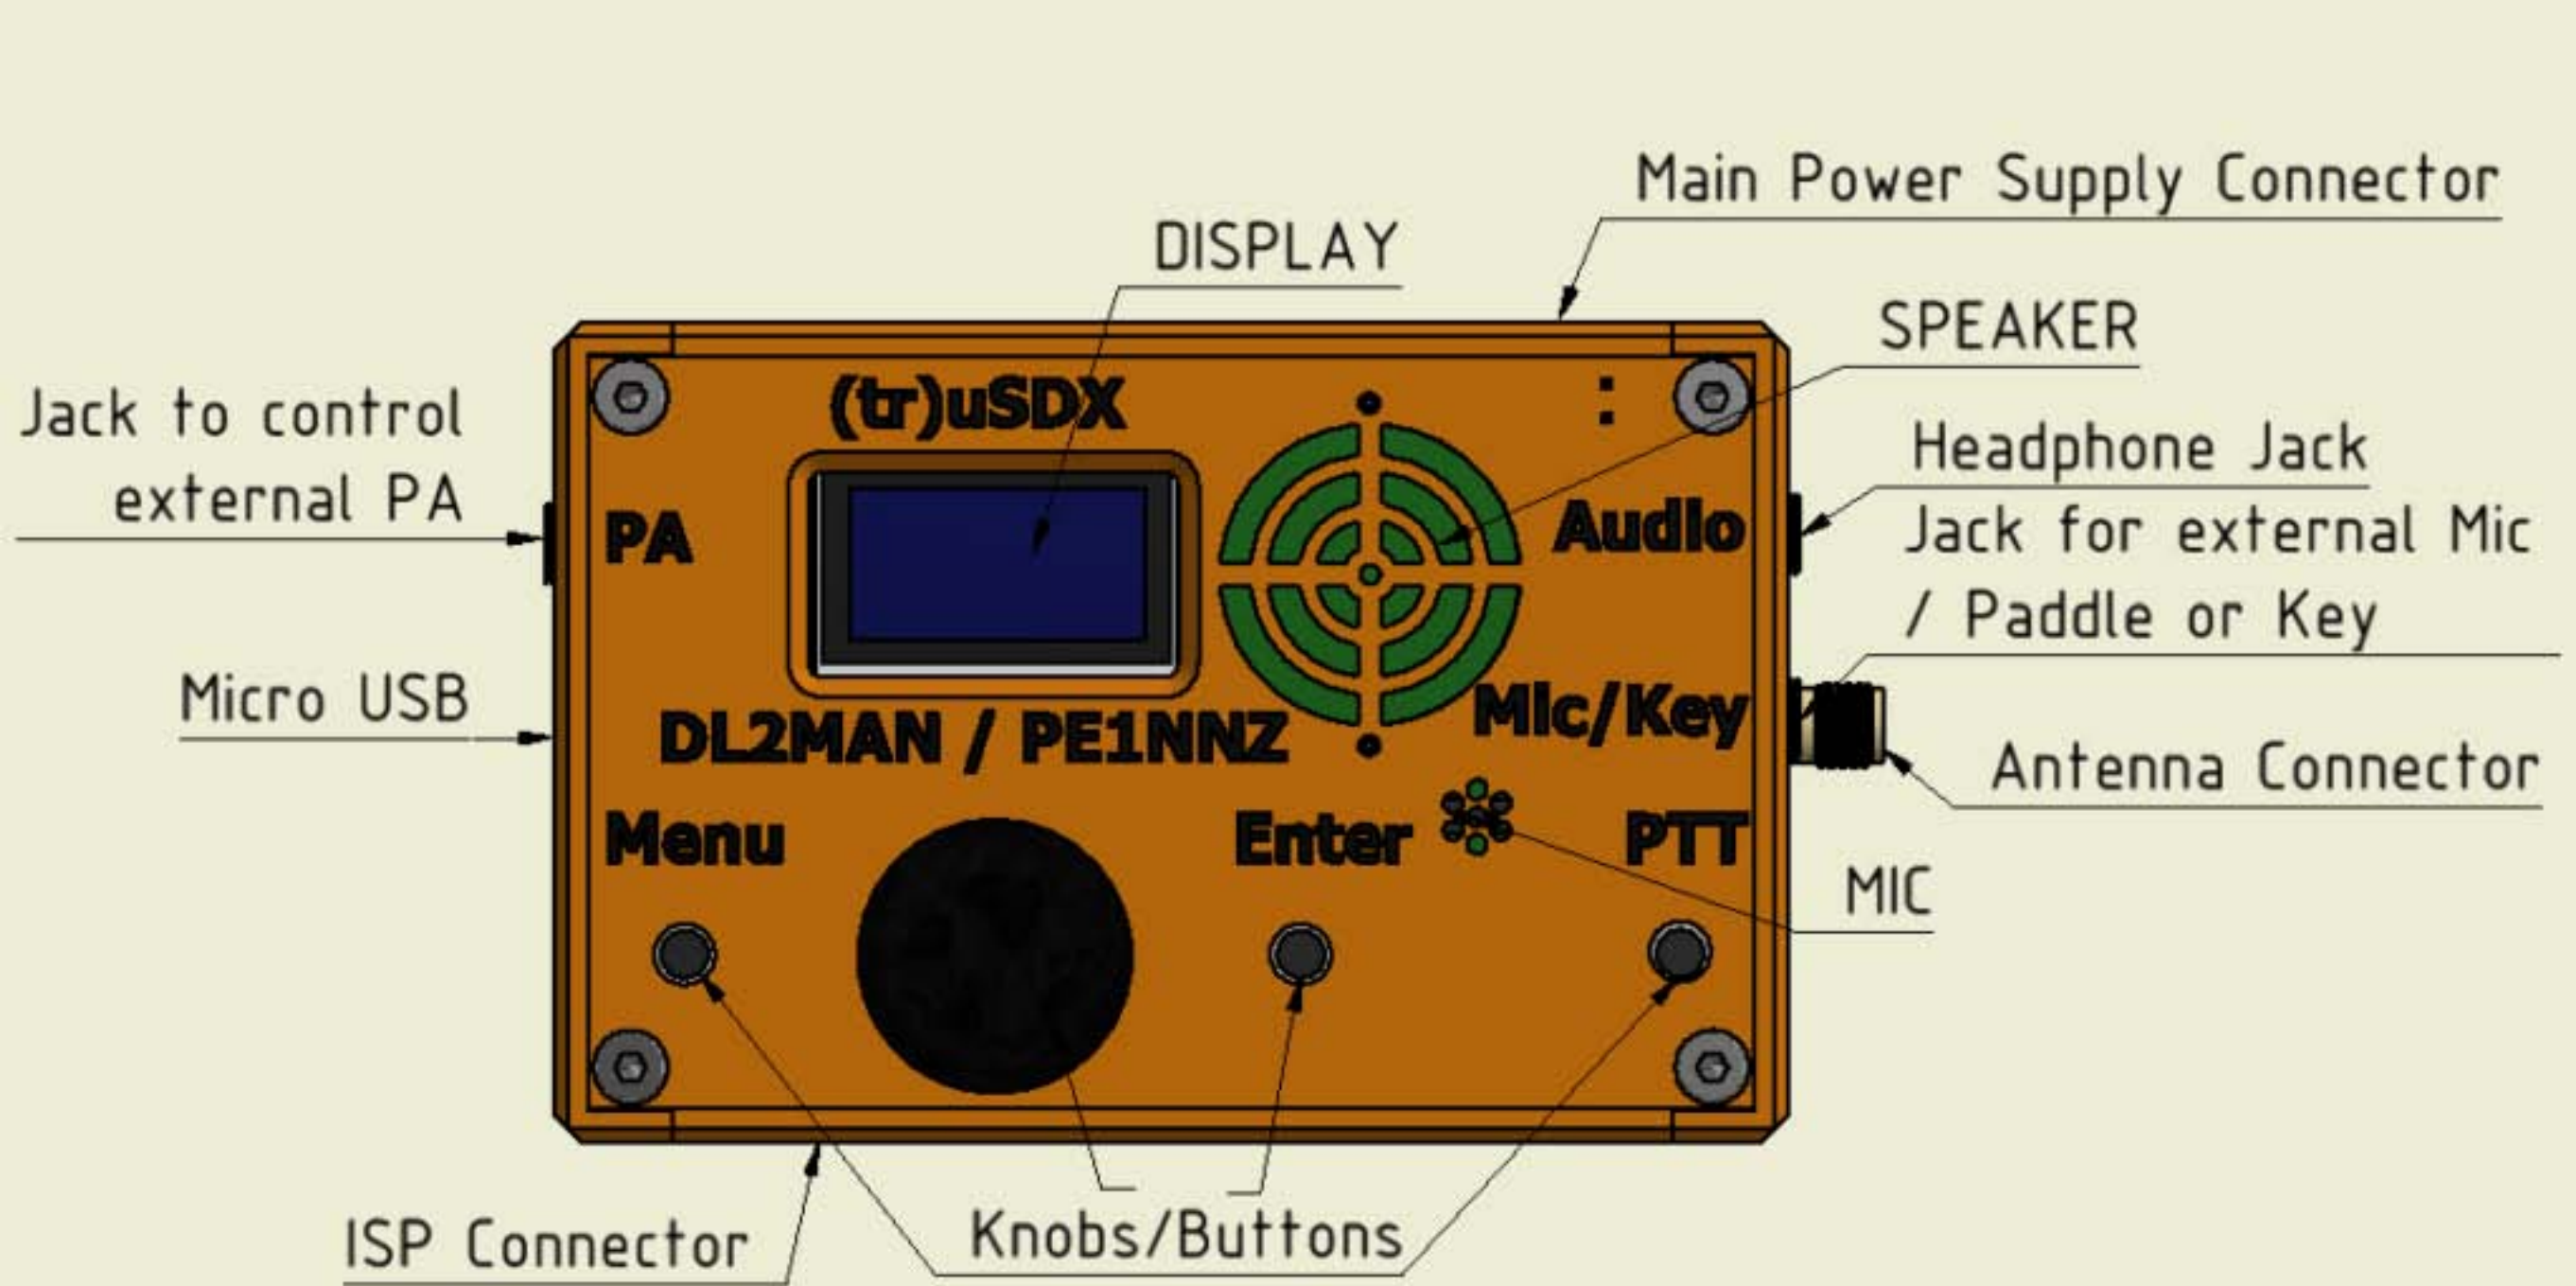



| | |
|----------------|----------------|
| press | enter menu |
| long press | spectrum scope |
| double click | - |
| press + rotary | tune spectrum |

| | |
|--------------|---------------------|
| turn | tune |
| press | decrease step |
| press + turn | volume / sleep mode |
| long press | increase step |
| double click | band change |

| | |
|-------------------|----------------|
| press | change mode |
| long press | RIT |
| double click | filter BW |
| double long press | toggle VFO A/B |