

# PRESIDENT

## LINCOLN II

MULTI  
COLOR  
DISPLAY



2+3\* years  
warranty  
PRESIDENT

ASCO  
Automatic  
frequency  
control



### BACK TO THE FUTURE

**AM / FM / USB / LSB / CW • DIN Format**  
**VFO - Continuous frequency variation (push/pull)**  
**Personalization menu: overvoltage protection...**  
**6 memories and many features to discover....**

nevada®

email: phil@nevada.co.uk  
tel: 023 9231 3095

Unit 1 Fitzherbert Spur  
Farlington  
Portsmouth PO6 1TT

CE

N°1  
CB  
PRESIDENT


MADE BY  
100%  
QUALITY  
PRESIDENT

100%  
RoHS  
EU norm

\*See warranty conditions on our website: [www.president-electronics.com](http://www.president-electronics.com)



- MENUS**
- Roger Beep Frequency *r bEEP Fr*
  - Roger Beep Time *r bEEP t*
  - Cw Frequency *CJLto Fr*
  - Call Frequency *CALL Fr*
  - Monitor Gain Volume *Montr no*
  - Tot (time Out Timer) *tot*
  - Swr Protection *ESr*
  - Swr Protection Setting *SJUr H!*
  - Voltage Protection *bAtP rot*
  - Voltage Protection High *SEtdC H!*
  - Voltage Protection Low *SEtdC Lo*
  - Scan Type *SCANt yp*
  - Backlight Color *CoLor*
  - Backlight Brightness *br, 9Ht*
  - ▲/▼ Keys Setting *UP dn*
  - Dw Setting *dJLl*
  - Reset *rESEt*

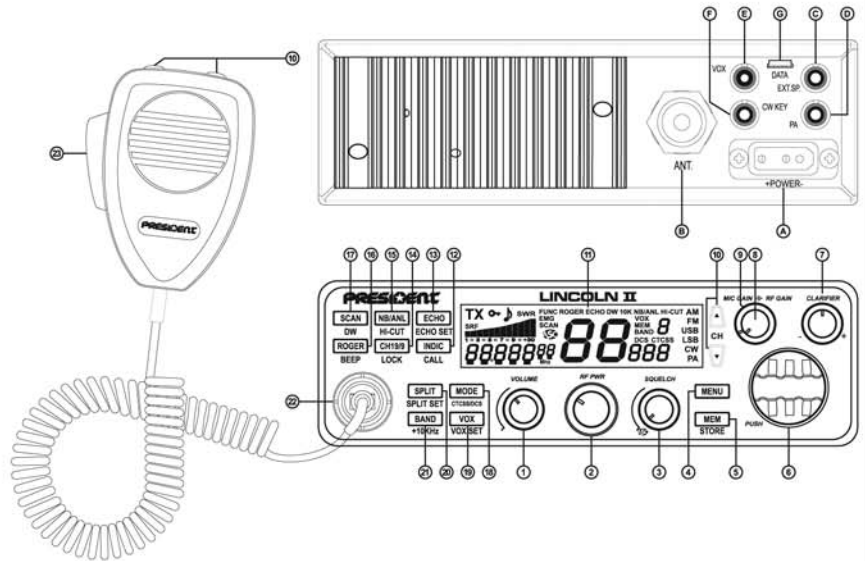

- ON/OFF ~ VOLUME
- RF POWER
- ASC (Automatic Squelch Control) ~ SQUELCH
- MENU
- MEM ~ STORE
- ROTARY "PUSH" KNOB
- CLARIFIER
- RF GAIN
- MIC GAIN
- ▲/▼ CHANNEL/FREQUENCY SELECTOR
- LCD
- INDIC ~ CALL
- ECHO ~ ECHO SET
- CH9/19 ~ LOCK
- NB/ANL ~ HI-CUT

- ROGER ~ BEEP
- SCAN ~ DW
- MODE ~ CTCSS/DCS
- VOX ~ VOX SET
- SPLIT ~ SPLIT SET
- BAND ~ +10KHz
- 6 PIN MICROPHONE PLUG
- PTT
- DC-POWER TERMINAL (13,2 V)
- ANTENNA CONNECTOR (SO-239)
- EXTERNAL SPEAKER JACK (8 Ω, Ø 3,5 mm)
- JACK FOR OPTIONAL PA (Public Address) (Ø 3.5 mm)
- JACK FOR CW DEVICE (Ø 3.5 mm)
- USB DATA

1407/11-13 - C0301b

## 1) GENERAL

- Modulation modes : AM / FM / USB / LSB / CW
- Frequency ranges : from 28.000 MHz to 29.700 MHz
- Antenna impedance : 50 ohms
- Power supply : 13,2 V
- Dimensions (in mm) : 170 (W) x 250 (D) x 52 (H)
- Weight : 1,4 kg
- Accessories supplied : microphone UP/DOWN with support, mounting cradle, crews and fused power cord

## 2) TRANSMISSION

- Frequency allowance : +/- 300 Hz
- Carrier power : 12 W AM / 28 W FM / 31 W USB-LSB (PEP) / 12 W CW
- Trans. interference : inferior to - 50 dBc
- Audio response : 300 Hz to 3 KHz in AM/FM/USB/LSB
- Emitted power in the adj. channel : inferior to 20 μV
- Microphone sensitivity : 3.0 mV
- Drain : 6 A (with modulation)
- Modulated signal distortion : 2 %

## 3) RECEPTION

- Maxi. sensitivity at 20 dB sinad : 0.7 μV - 110 dBm (AM)  
0.35 μV - 116 dBm (FM)  
0.28 μV - 118 dBm (USB/LSB/CW)
- Frequency response : 300 Hz to 3 kHz in AM/FM/LSB/USB
- Adjacent channel selectivity : 60 dB
- Maximum audio power : 3 W
- Squelch sensitivity : minimum 0.2 μV - 120 dBm  
maximum 1 mV - 47 dBm
- Frequency image rejection rate : 60 dB
- Intermediate frequ. rejection rate : 70 dB
- Drain : 400 mA nominal / 600 mA max.

# Specifications

