

High Power Universal Remote Tuner 1500 (CHA URT1500)

The CHA URT1500 is a high power, wide-range, remote outdoor tuner for almost any type of antenna and any brand or model transceiver. The CHA URT1500 is unique in that it can be used for coaxial cable or wire fed antennas. The CHA URT1500 does not need a transceiver-specific control cable, so it works with any brand or model of transceiver. The rugged Tuner Unit is weatherproof and designed to be permanently installed outdoors at or near the antenna feedpoint, so loss due to high SWR on the feedline is avoided. Also, operation of the CHA URT1500 is one-button easy!



Front




Back

-Coupler Unit-



Top

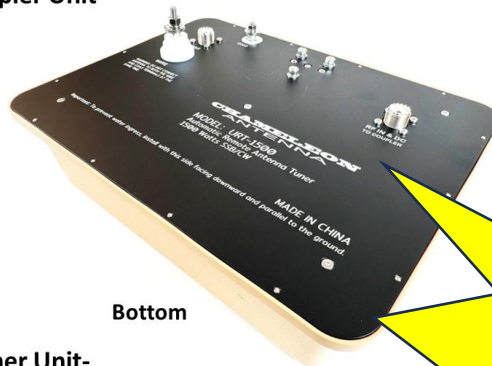

Bottom



-Tuner Unit-

The CHA URT1500 can tune coaxial cable fed antennas, like a dipole or Inverted "V". It can also tune verticals or random / long wire antennas.

**High Power
up to
1500 Watts!**

Specifications

- **Frequency Range:** 1.8 to 30.0 MHz.
- **Power Handling:** 1500W SSB/CW, 800W most digital modes, 400W AM/RTTY/WSPR and other continuous duty modes.
- **Tuning Power Range:** 5 - 15 Watts
- **Tuning Time:** 8 Seconds full tune / 0.1 Seconds for memory tune.
- **Tuning Ratio Range:** 16:1
- **Memory:** 16,000 frequencies with built in frequency sensor.
- **Power Supply:** 12-14V DC, 2.0A

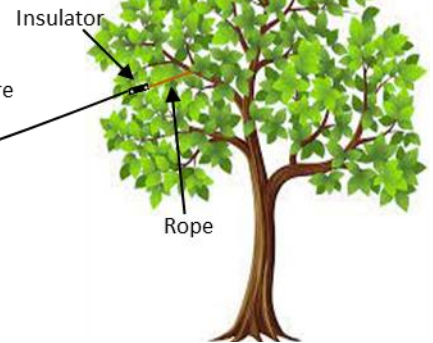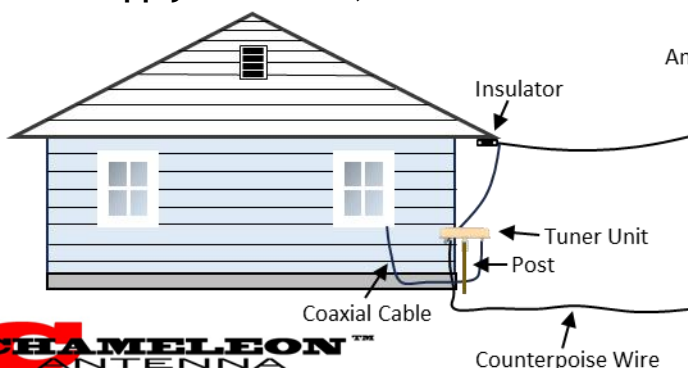

CHAMELEON
ANTENNA

www.chameleonantenna.com

Nevada - USA