


# IC-AH2b.

## Antenna Element & Bracket.


The IC-AH2b antenna element is made from high quality stainless steel and includes a full bumper mounting kit for communications on the move.

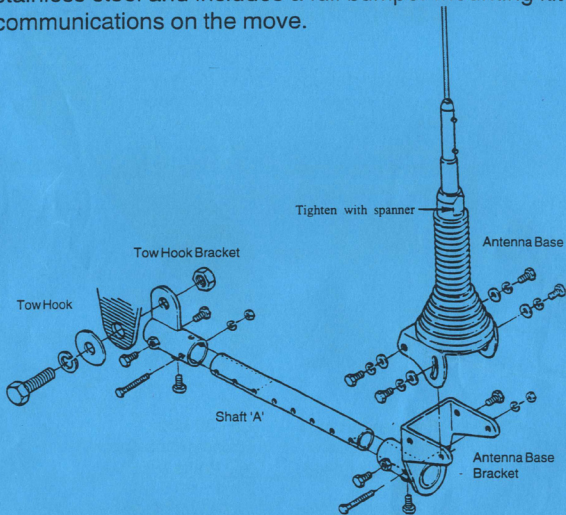

## SPECIFICATIONS:

Antenna Element length :	2.5 Metres (8.2 Feet)
Feedline Length:	0.9 Metres (3.0 Feet)
Frequency Coverage:	3.5-28 MHz bands

## Automatic Antenna Tuners Compatible with AH2b

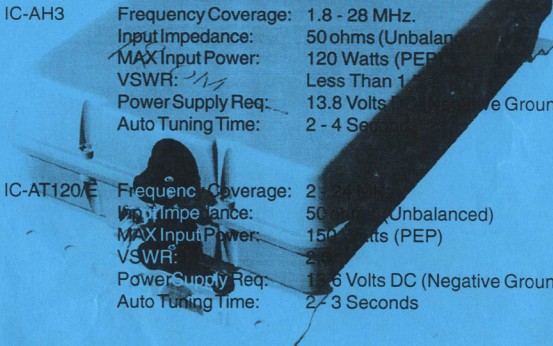

IC-AH3	Frequency Coverage:	1.8 - 28 MHz.
	Input Impedance:	50 ohms (Unbalanced)
	MAX Input Power:	120 Watts (PEP)
	VSWR:	Less Than 1.5
	Power Supply Req:	13.8 Volts DC (Negative Ground)
	Auto Tuning Time:	2 - 4 Seconds
IC-AT120/E	Frequency Coverage:	2 - 30 MHz.
	Input Impedance:	50 ohms (Unbalanced)
	MAX Input Power:	150 Watts (PEP)
	VSWR:	2.0:1
	Power Supply Req:	13.6 Volts DC (Negative Ground)
	Auto Tuning Time:	2 - 3 Seconds
IC-AT130	Frequency Range:	1.6 - 30 MHz.
	Input Impedance:	50 ohms (Unbalanced)
	MAX Input Power:	150 Watts (PEP)
	VSWR:	2.0:1
	Power Supply Req:	13.6 Volts DC (Negative Ground)
	Auto Tuning Time:	2 - 3 Seconds (Memory) 15 seconds (VFO)