


# National

## NC - 300 RECEIVER AND ACCESSORIES

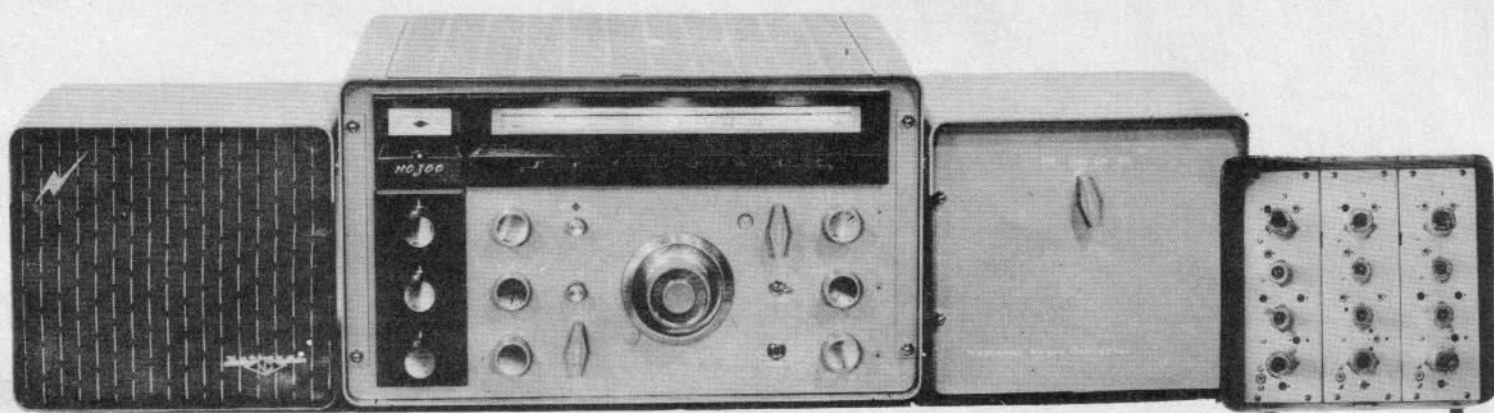

### NC-300TS SPEAKER

Two-tone grey enamel finish with black and silver grille cloth. Speaker size: 8". Speaker cabinet: 10 3/4" wide x 9 3/8" high x 8" deep. Shipping weight: 10 lbs.

LIST \$17.00 \*

### NC-300 RECEIVER

Two-tone grey enamel finish. Size: 19 1/2" wide (19" rack out of cabinet) x 11 1/4" high x 15" deep. Shipping weight: 60 lbs.


LIST \$399.00 \*

### NC-300 CC CONVERTER CABINET

### REAR VIEW

An attractive cabinet designed to house three accessory converters for the 6, 2 and 1 1/4 meter bands. Complete system eliminates need to unplug converters to change bands or to shut off converters. Selector switch switches all power and IF output leads. Two-tone grey enamel finish. Size: 10 3/4" wide x 9 3/8" high x 8" deep. Shipping weight: 10 lbs.


LIST \$17.95 \* CABINET ONLY

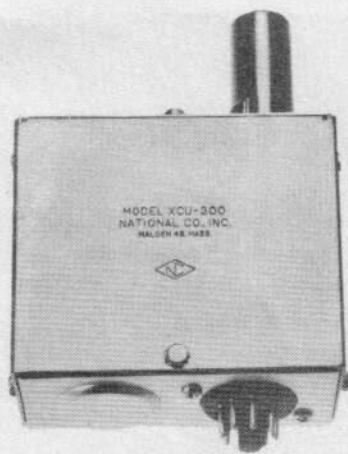

### XCU-300 PLUG-IN CRYSTAL CALIBRATOR

Crystal Calibrator plugs into NC-300 receiver where it derives its operating power. Provides calibrating signal every 100 kc up to 29.7 mc. Is factory pre-set at exactly 100 kc.


LIST \$19.95 \*

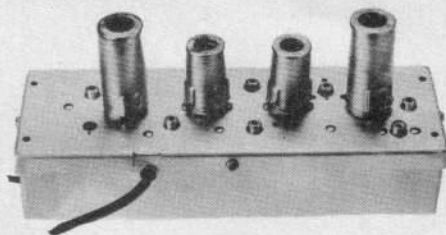

### NC-300 C6 CONVERTER FOR 6 METER BAND

Coverage: 49.5 - 54.5 mc. Noise figure: 3 - 4 db. Tube types: 6BZ7, 6AK5, 6AK5, 6U8. Crystal frequency: 19.5 mc. Output frequency: 30 - 35 mc. Input impedance: 50 - 70 ohms. Output impedance: 50 ohms. Power required: 6.3 volts at 1.2 amps, 150 volts at 25 ma derived from NC-300. Size: 9" long x 4" high x 3" wide. Shipping weight: 2 lbs.


LIST \$41.95 \* COMPLETE WITH CRYSTAL AND TUBES

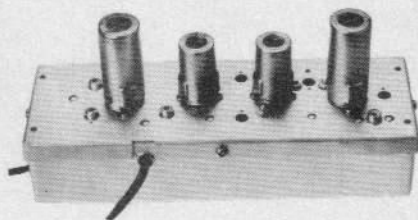

### NC-300 C2 CONVERTER FOR 2 METER BAND

Coverage: 143.5 - 148.5 mc. Noise figure: 4 - 5 db. Tube types: 6BZ7, 6AK5, 6AK5, 6U8. Crystal frequency: 37.833 mc. Output frequency: 30 - 35 mc. Input impedance: 50 - 70 ohms. Output impedance: 50 ohms. Power required: 6.3 volts at 1.2 amps, 150 volts at 25 ma derived from NC-300. Size: 9" long x 4" high x 3" wide. Shipping weight: 2 lbs.

LIST \$43.95 \* COMPLETE WITH CRYSTAL AND TUBES

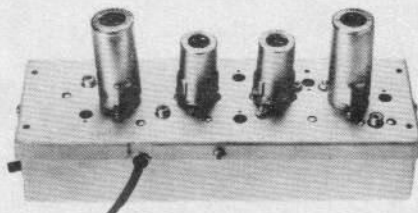

### NC-300 C1 CONVERTER FOR 1 1/4 METER BAND

Coverage: 220 - 225 mc. Noise figure: 5 - 7 db. Tube types: 6BZ7, 6AK5, 6AK5, 6U8. Crystal frequency: 47.5 mc. Output frequency: 30 - 35 mc. Input impedance: 50 - 70 ohms. Output impedance: 50 ohms. Power required: 6.3 volts at 1.2 amps, 150 volts at 25 ma derived from NC-300. Size: 9" long x 4" high x 3" wide. Shipping weight: 2 lbs.

LIST \$39.95 \* COMPLETE WITH CRYSTAL AND TUBES

*tuned to tomorrow*

# National

61 SHERMAN ST., MALDEN 48, MASS.

\* Prices slightly higher west of the Rockies and outside the continental U. S. A.

\* Prices subject to change without notice.