

FOR YOUR SAFETY

To ensure safe operation of Alinco's products, please read the "Warning" section before using this product. To ensure safe operation and prevent any danger to life and/or property, you may find the symbols shown below in this manual. Please read and understand the meaning of these symbols before using this product.

Symbols	Explanation
Danger	This symbol is intended to alert the user to an immediate danger that may cause loss of life and/or property if the user disregards the warning.
Alert	This symbol is intended to alert the user to a possible hazard that may cause loss of life and/or property if the user disregards the warning.
Caution	This symbol is intended to alert the user to a possible hazard that may cause injury or the loss of property if the warning is disregarded.

Symbols	Explanation
	The Δ symbols contain information on what the user should be aware of in terms of dangers, alerts and cautions.
	The \circ symbol informs the user of prohibited acts. Specific information of what is prohibited is drawn inside or near the symbol.
	The \bullet symbols contains information on what the user is instructed to do. Specific information on the instruction is inside the symbol (in this case the symbol instructs the user to unplug the adapter from the wall outlet).

The manufacturer declines any responsibilities against economic loss due to loss of communication opportunities caused by external factors such as malfunctions, failures and/or blackouts.

Warning

- This unit should only be used with a standard wall outlet 120VAC for DM-430T, 230VAC for DM-430E. If it is used in any other manner electric shock and fire could occur.
- Wash skin and or clothes immediately with water if any liquid leaks from inside the unit and comes in contact with. It may irritate the skin and could stain clothing. If any liquid gets into the eye, wash immediately and contact a doctor. It may cause injury to the eye.
- Never touch the chassis of the unit during use. The surface of the product may become very hot, especially the heat sink. A burn to the skin may occur.
- Do not short-circuit the cables. Make sure the cables are connected to the correct terminal. (Positive to positive and negative to negative)
- Do not use two or more units in series or parallel operation. This may cause damage to the unit, and risk shocks and fire.
- The output terminal must be screwed tightly when use it, and periodically check the connections.

This power supply is designed for amateur radio. Please do not use it for other purposes.

ALINCO

SWITCHING MODE DC REGULATED POWER SUPPLY DM-430T/E

INSTRUCTION MANUAL

Thank you for purchasing the Alinco switching mode DC regulated power supply, DM-430T/E. The DM-430T/E instruction manual contains important safety and operating instructions. Please read this manual carefully before using this product and keep the manual for future reference.

ALINCO, INC.

ALINCO, INC.

Yodoyabashi-Dai building 13th Floor
4-9, 4-Chome, Koraihashi, Chuo-ku, Osaka 541-0043, JAPAN
Phone: +81-6-7536-2362 Fax: +81-6-6208-3802
http://www.alinco.com
E-mail: export@alinco.co.jp



Relative certificate can be reviewed at <http://www.alinco.com/ce/>.

©Alinco, Inc., Osaka, Japan. All rights reserved. Although Alinco has designed this manual to be as comprehensive and accurate as possible, we reserve right to make changes at any time to the contents or our specifications.

PS0887
FNJ-NL

Danger

- Do not disassemble, modify or repair the unit unless otherwise specified in the manual. Only an authorized technician may do this. Never modify the cable to extend or shorten it. This may cause fire and or electric shock, and will void the warranty.
- Never use the unit outside, in a bathroom, or any other place where the unit could become wet. Do not rest anything that contains liquid on the product. If liquid gets inside the unit it could cause fire, shock and damage to the unit. If this happens, unplug the unit immediately. Do not use the unit in a humid environment. If dew condenses on the unit, dry it completely before use.
- Always hold the plug when plugging and unplugging the unit. Never unplug the unit by pulling the cable. It may cause fire, shock and damage to the unit.
- Unplug the unit during maintenance. Otherwise it may cause shock and damage to the product.
- Do not plug/unplug the unit with wet hands. It may easily cause electric shock.
- Unplug immediately if anything noticeably unusual happens, such as smoke and or strange odors coming from the unit. Contact our authorized service centers immediately for service.
- Do not use the unit where there may be flammable gas. This may cause fire and explosion.
- Unplug the cable when replacing the fuse. Use the specified fuse only. Using the wrong fuse could cause heat and fire.

Caution

- Use this unit only in room temperatures. (10 to 35 degrees centigrade or 50 to 95 degrees Fahrenheit) Keep the unit in a dry and well-ventilated place. Do not use the unit in direct sunlight, or where it may come in contact with water or in a poorly ventilated area. It may cause heat, fire and damage to the unit.
- Place the unit on a secure and horizontal surface. If it is placed on an unstable surface, the unit may drop and cause damage and injury.
- Do not cover the air vent on the chassis or the fan. This may cause extreme heat, fire and damage.
- Do not use the unit for devices that require high current input at the start, such as motorized equipment. Do not use the unit to charge a car battery. This may cause damage to the unit.
- Never leave the unit within a child's reach. This may injure them or burn their skin.
- Make sure that the devices that are to be connected meet the specifications of this unit, otherwise it may cause damage to the product.
- Never insert any metal or flammable objects inside the unit. It may cause damage, shock and fire. If any foreign objects get into the unit, turn it off and unplug it and contact an authorized service center.

INTRODUCTION

Alinco's DM-430T/E is a high efficiency, compact, lightweight high performance switching mode power supply. Also convenient functions like output voltage fix, and a highly visible back lit digital meter are standard in this power supply.

CAUTION

- Even though the chassis of the unit is negatively grounded, use the correct terminals to connect cables.
 - When plugging the unit into a wall outlet, it must be turned off.
 - Place the unit in a dry and well-ventilated area.
 - Never touch the unit while in use. Even though it is designed for high efficiency, the unit will still become hot. If the unit reaches a certain temperature, the "extreme temperature protection" function will protect the unit by automatically dropping the current down to a safe level.
 - The unit has overloading and short-circuit protection circuits. Overloading protection automatically checks and controls level of output current at a safe level (or cuts off when extremely overloaded). Short-circuit protection detects short-circuit and turns the unit off immediately.
- At any case when the unit is protected, remove the cause of trouble, await about a minute then turn it back on.
- Do not use the unit for devices that require high current input at the start, such as motorized equipment. Never use the unit to charge a car battery.
 - Make sure the product is always suitably grounded to prevent electric shock and to avoid cause damage to the product and will void the warranty. use without grounding may cause damages to this product and voids warranty.


SPECIFICATIONS

Input voltage: 120VAC (DM-430T) / 230VAC (DM-430E)
Output voltage: 5-15VDC
Output voltage regulation: less than 2%
Protection: Short-circuit, Automatic current limiting over 30A Over-temperature
Output current: 30A (max), 25A (continuous)
Ripple: less than 80mVp-p at rated load
Fuse: 8A (DM-430T) / 5A (DM-430E)
Meter: Digital volt / current meter with back-lit
Dimensions: 125(W) x 60(H) x 160(D) mm (Projections not included)
Weight: approx. 1.6kg with AC cord

⚡ Anderson Powerpole is a registered trademark of Anderson Power Products, INC.

PART NAMES AND FUNCTIONS

Front View Rear View

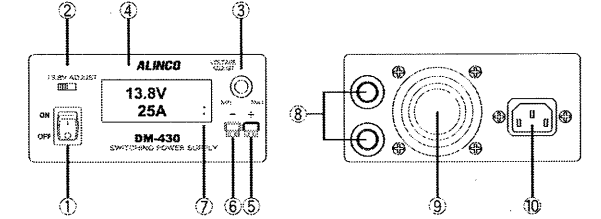

- Power switch:** Turns the unit on and off.
- Voltage fixing switch:** The output voltage can be fixed at 13.8V or adjustable by ③.
- Voltage adjustment:** Adjusts voltage between 5.0 and 15.0 volts. Turn clockwise to increase and counter clockwise to decrease the voltage.
- Digital Meter:** Displays the output voltage and current.
- Output terminal Red (Anderson Powerpole connector):** Positive (+) 30A max
- Output terminal Black (Anderson Powerpole connector):** Negative (-) 30A max
- Current indication:** Indicates current load in 5 levels by dots.
- Output terminal:** 30A max, Red positive, black negative.
- Cooling fan:** The fan turns on and off automatically. (Internal temperature at 45°C)
- Power socket:** 120VAC (DM-430T) / 230VAC (DM-430E)

※ The total of all output terminals in use are less than 30A. It DOES NOT mean that the front and terminals can output 30A independently.