
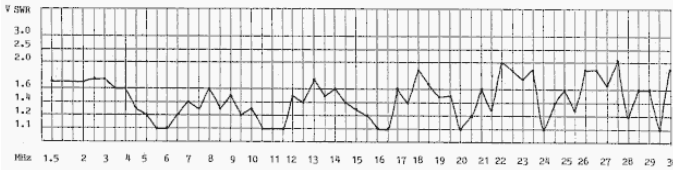


TACTICAL&FIXED HF ANTENNA SYSTEM 1.5 TO 30 MHz.

CONTINUOUS TUNING ANTENNAS

Mod. 1530/F-M

It is Half a rhombic terminated and vertically polarized antenna with RF transformer. It does not require any tuner in 1.5 – 30 MHz spectrum. It can be assembled in V-inverted or sloper version and it does not require particular heights so a 6 to 12 m (19.6 to 39.2 ft.) support is suitable.

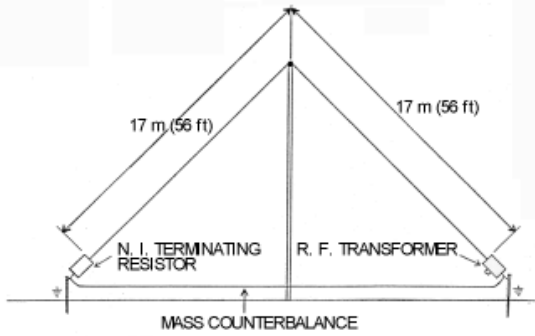


Mod. 1530/F

INSTALLATION TYPOLOGY


INVERTED-Y

- OMNIDIRECTIONAL
- VERTICAL POLARIZATION
- SUPPORT OF 6 TO 12m (20 TO 40 ft.)
- ANTENNA EXTREMES OF 0.5 TO 1m (2 TO 4 ft.)

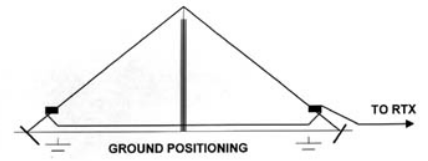

SLOPER

- OMNIDIRECTIONAL
- HORIZONTAL/VERTICAL POLARIZATION
- SUPPORT OF 6 TO 12m (20 TO 40 ft.)
- ANTENNA EXTREME OF 0.5 TO 1m (2 TO 4 ft.)

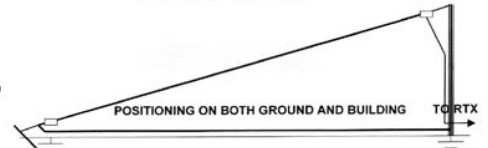

Mechanical-electrical features	Mod. 1530/F-M
Continuous covering MHz	1.5 - 30
Max. applicable power	1KW PeP
SWR	See graph
Impedance	50 ohms
Connector	N female
Length	34m (17+17 m) 112ft (56+56ft)
Net weight	3 kg (6.6 lbs)
Max. speed of wind	160 km/h (100 mph)
Operating temperature range	-30 - +60 °C
Storage	-40 - +85 °C
Shipping Wt.	6 kg (13 lbs)
Box	cm 70x25xh8 (28x10xh3 in)

